



Designed For
Enhanced
Efficiency




ROCA SERIES
300x600MM

EARTH
— COLLECTION —



Distinctive

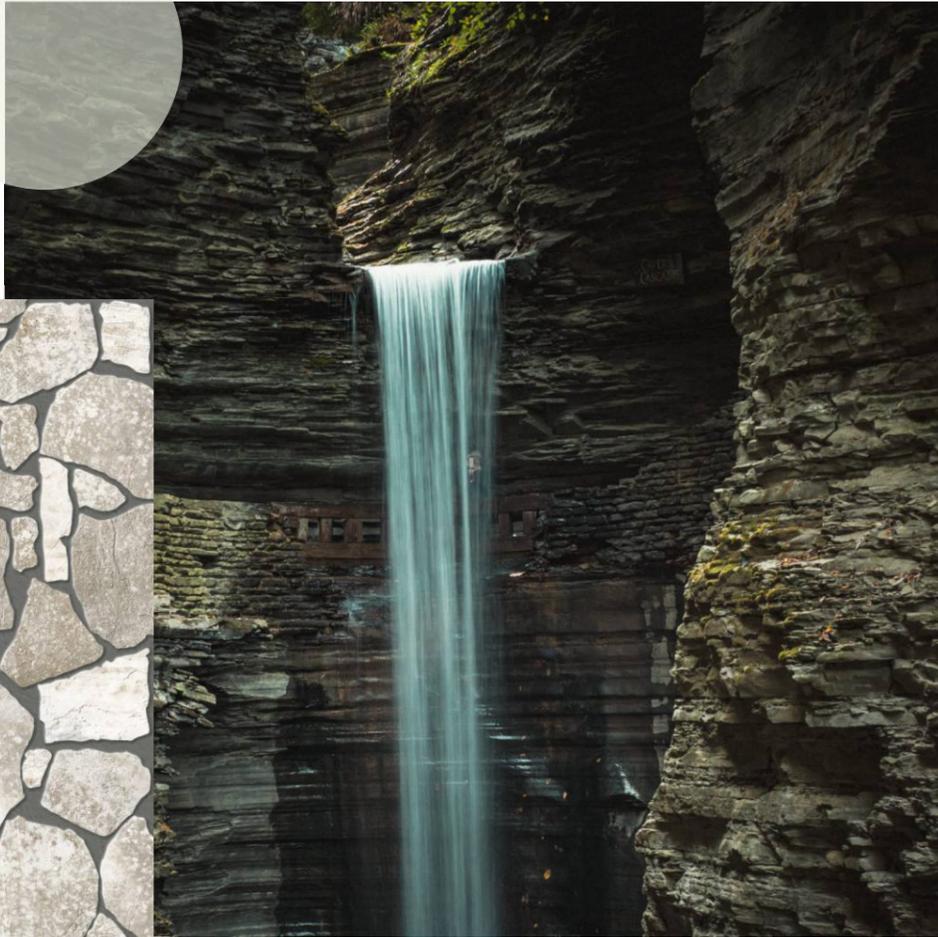

About Us

Rey Cera, a company founded in 1990, has been manufacturing and selling integral porcelain tiles for all kinds of flooring and wall tiling solutions.

The manufacturing plant and main offices in Morbi, Gujarat IN, and the Worldwide logistics warehouses, make it possible to supply and deliver all the items in customers' orders. Through its national and international distribution network, Rey Cera exports tiles to more than 85 countries in all five continents.

As a result of our commitment to quality, all of our products comply with the guidelines of the ISO 9001:2000 standard, which guarantees that our research, development and commercializations are carried out with the maximum guarantees.

www.reycera.com




EARTH
— COLLECTION —

Our Rustic Mott Finish gives easy solutions to urban areas and heavy traffic places. The best extruded GVT tile with 12 mm thickness and an antislip rate R11. The Earth Collection Tiles are highly resistant against abrasion, as well as a strong bending resistance. Earth Collection is perfect for pedestrian areas, squares in the city, traffic areas, entrance of houses, urban area and all kind Of heavy duty areas,

FEATURES & APPLICATION

- | | | | | | |
|--|--|---|---|---|---|
| 
Residential Areas | 
Urban Areas | 
Terrace & Patios | 
Commercial Areas | 
Swimming Pools | 
Gardens |
| 
Random Moulds | 
Low Maintenance | 
Water Resistance | 
Vitrified Body | 
High Strength | 
Modularity |

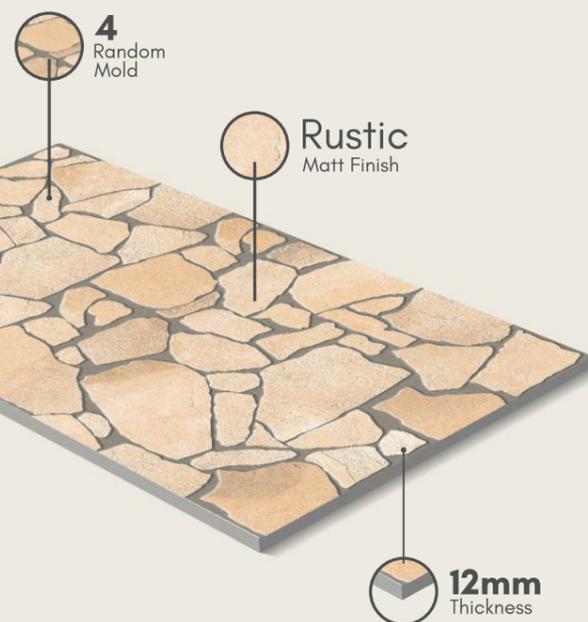

ONE *Concept* MULTIPLE SIZE

Random MOULDS *Modular* PARKING *Pavimento* INTERIOR & EXTERIOR


1st ceramic company to introduce patented **E N D M A T C H** Concept across the world!



**INTELLECTUAL
PROPERTY INDIA**
PATENTS | DESIGNS | TRADE MARKS
GEOGRAPHICAL INDICATIONS




**1ST
TIME
IN
WORLD**

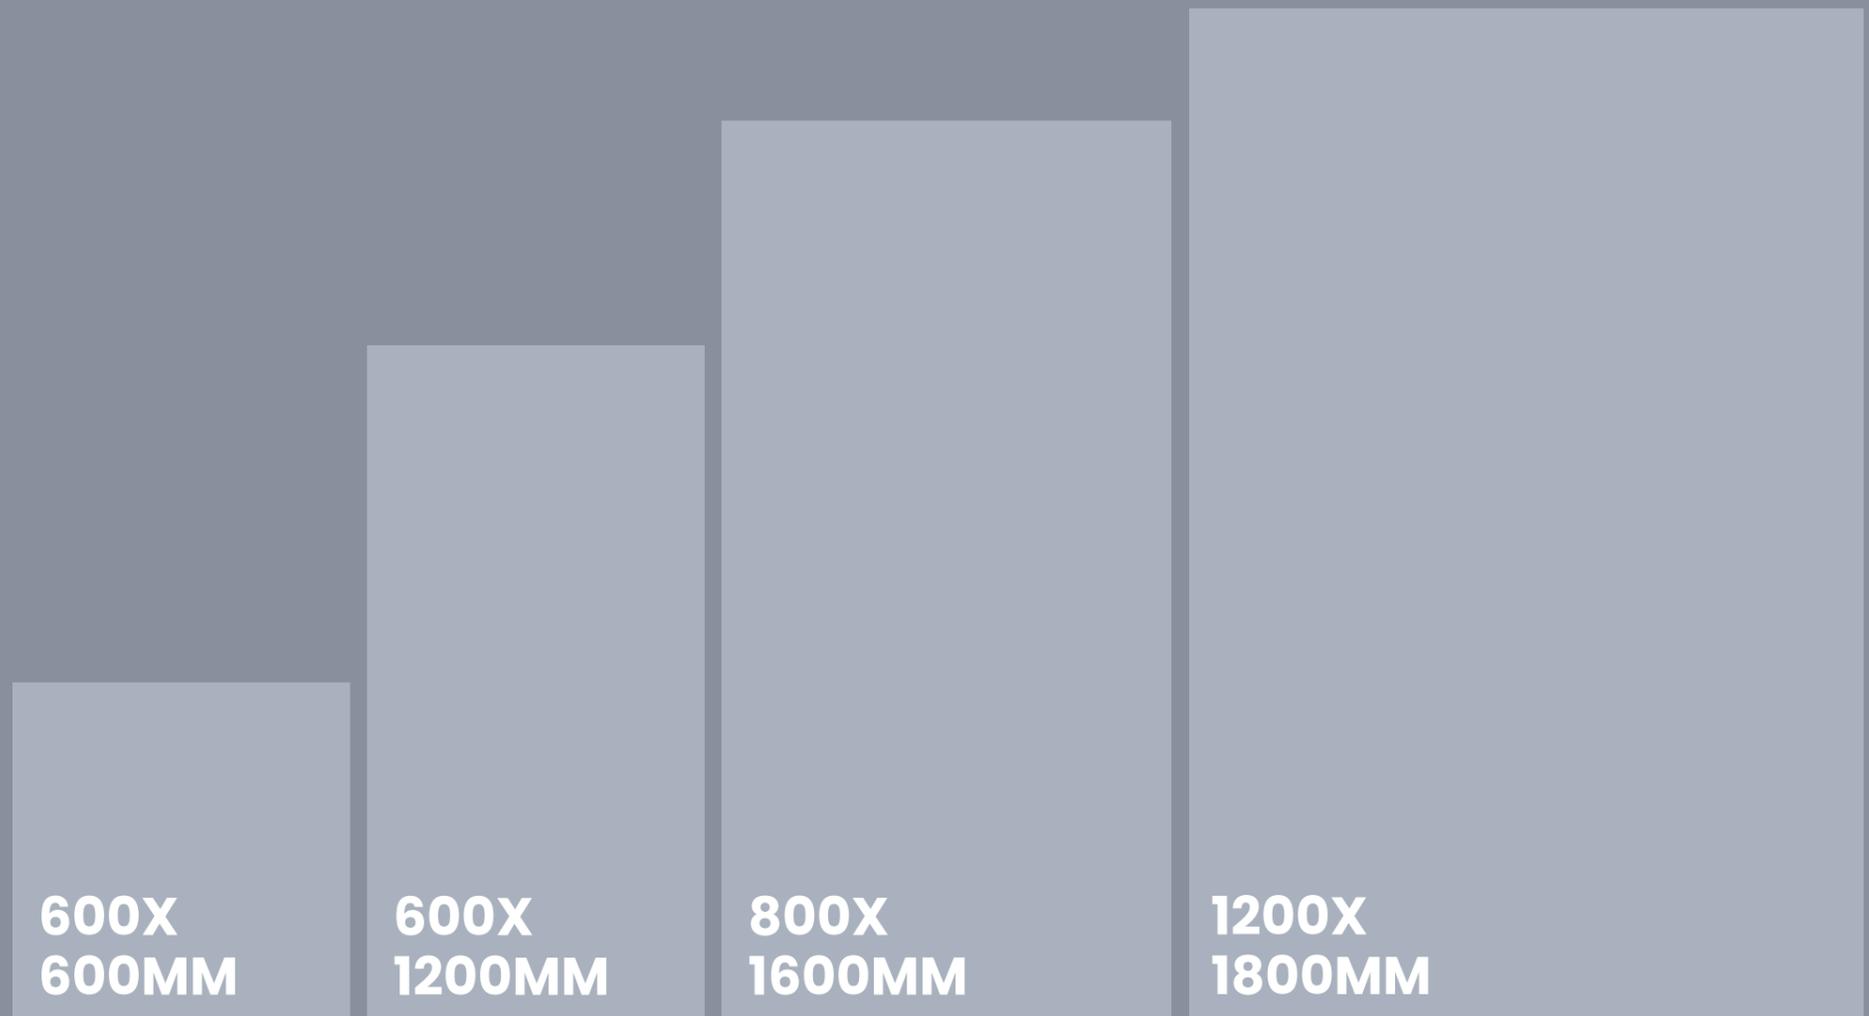



ROCA BEIGE

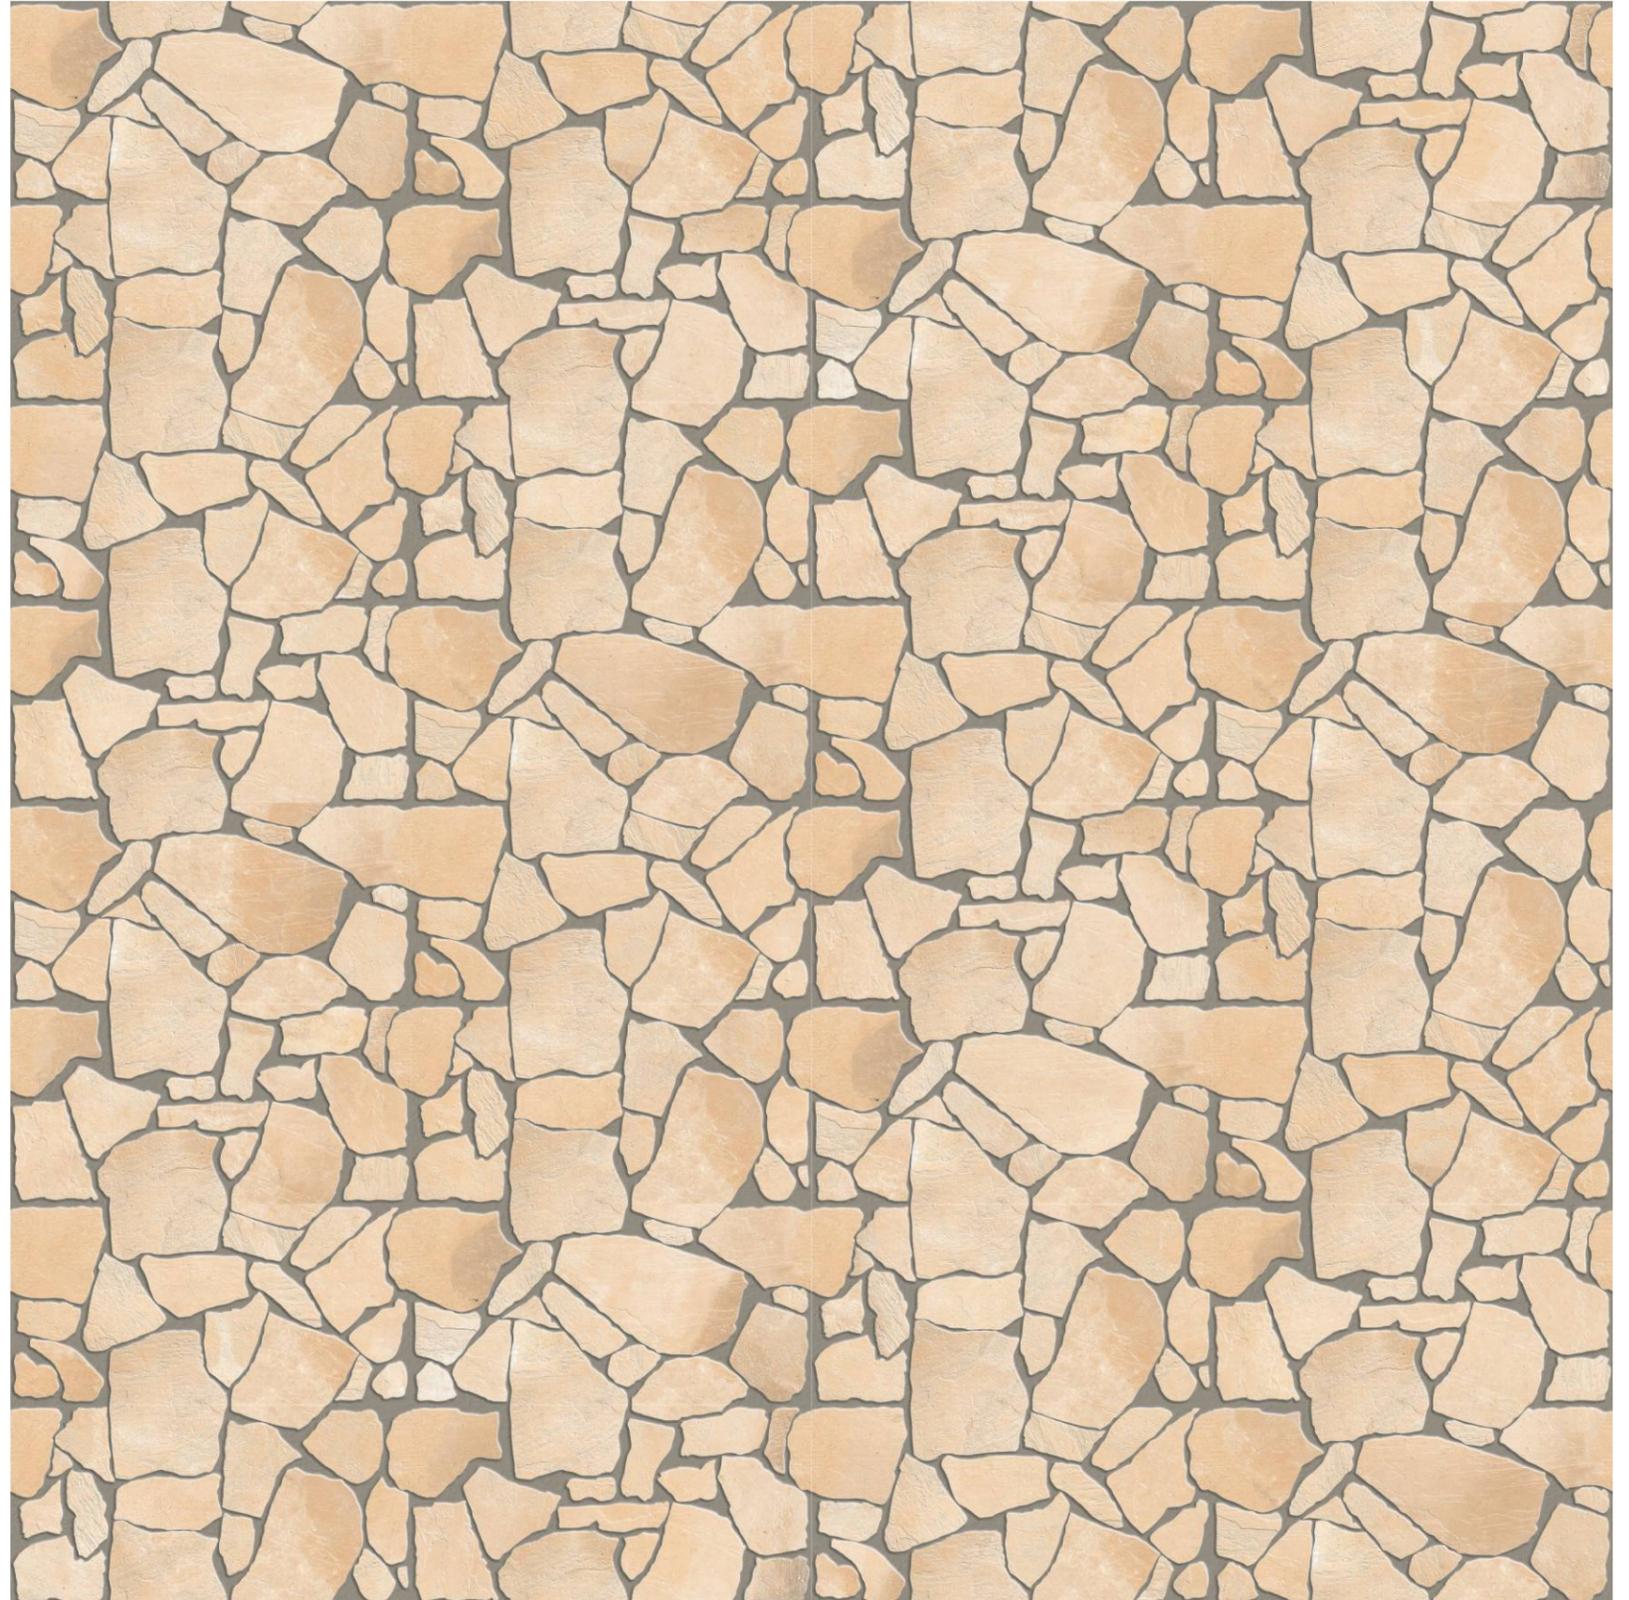

**300X
600MM**

**RUSTIC
MATT FINISH**



**12MM
THICKNESS**

**32
RANDOM**

PACKAGING DETAILS :

PCS PER BOX	WEIGHT PER BOX	AREA COVERAGE	BOX PER PALLET
4 Pcs.	18 kg. (Approx)	0.72 sqm./per box	72




DESIGN : **ROCA BEIGE**
SIZE : **300X600MM**
FINISH : **RUSTIC MATT**
RANDOM : **32**





ROCA BROWN

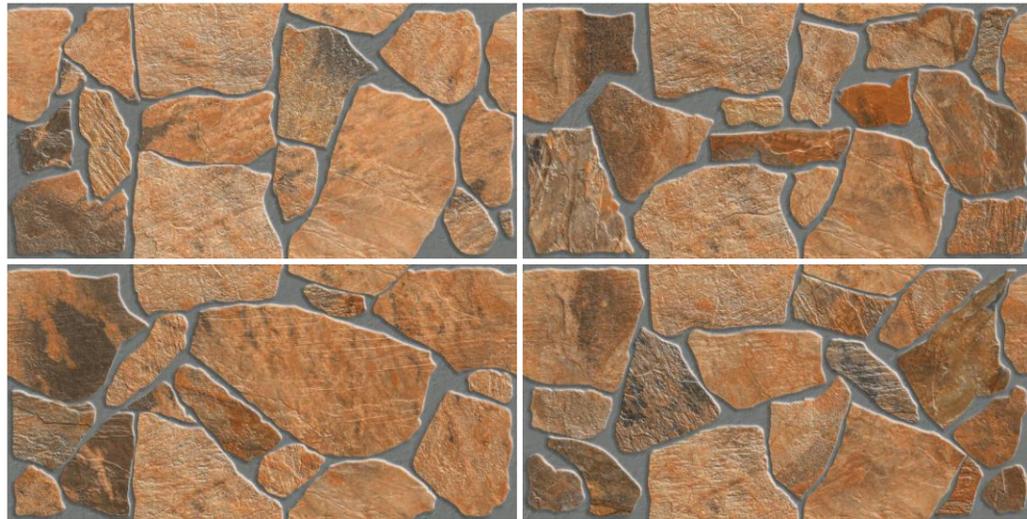

**300X
600MM**

**RUSTIC
MATT FINISH**




**12MM
THICKNESS**

**32
RANDOM**

PACKAGING DETAILS :

PCS PER BOX	WEIGHT PER BOX	AREA COVERAGE	BOX PER PALLET
4 Pcs.	18 kg. (Approx)	0.72 sqm./per box	72

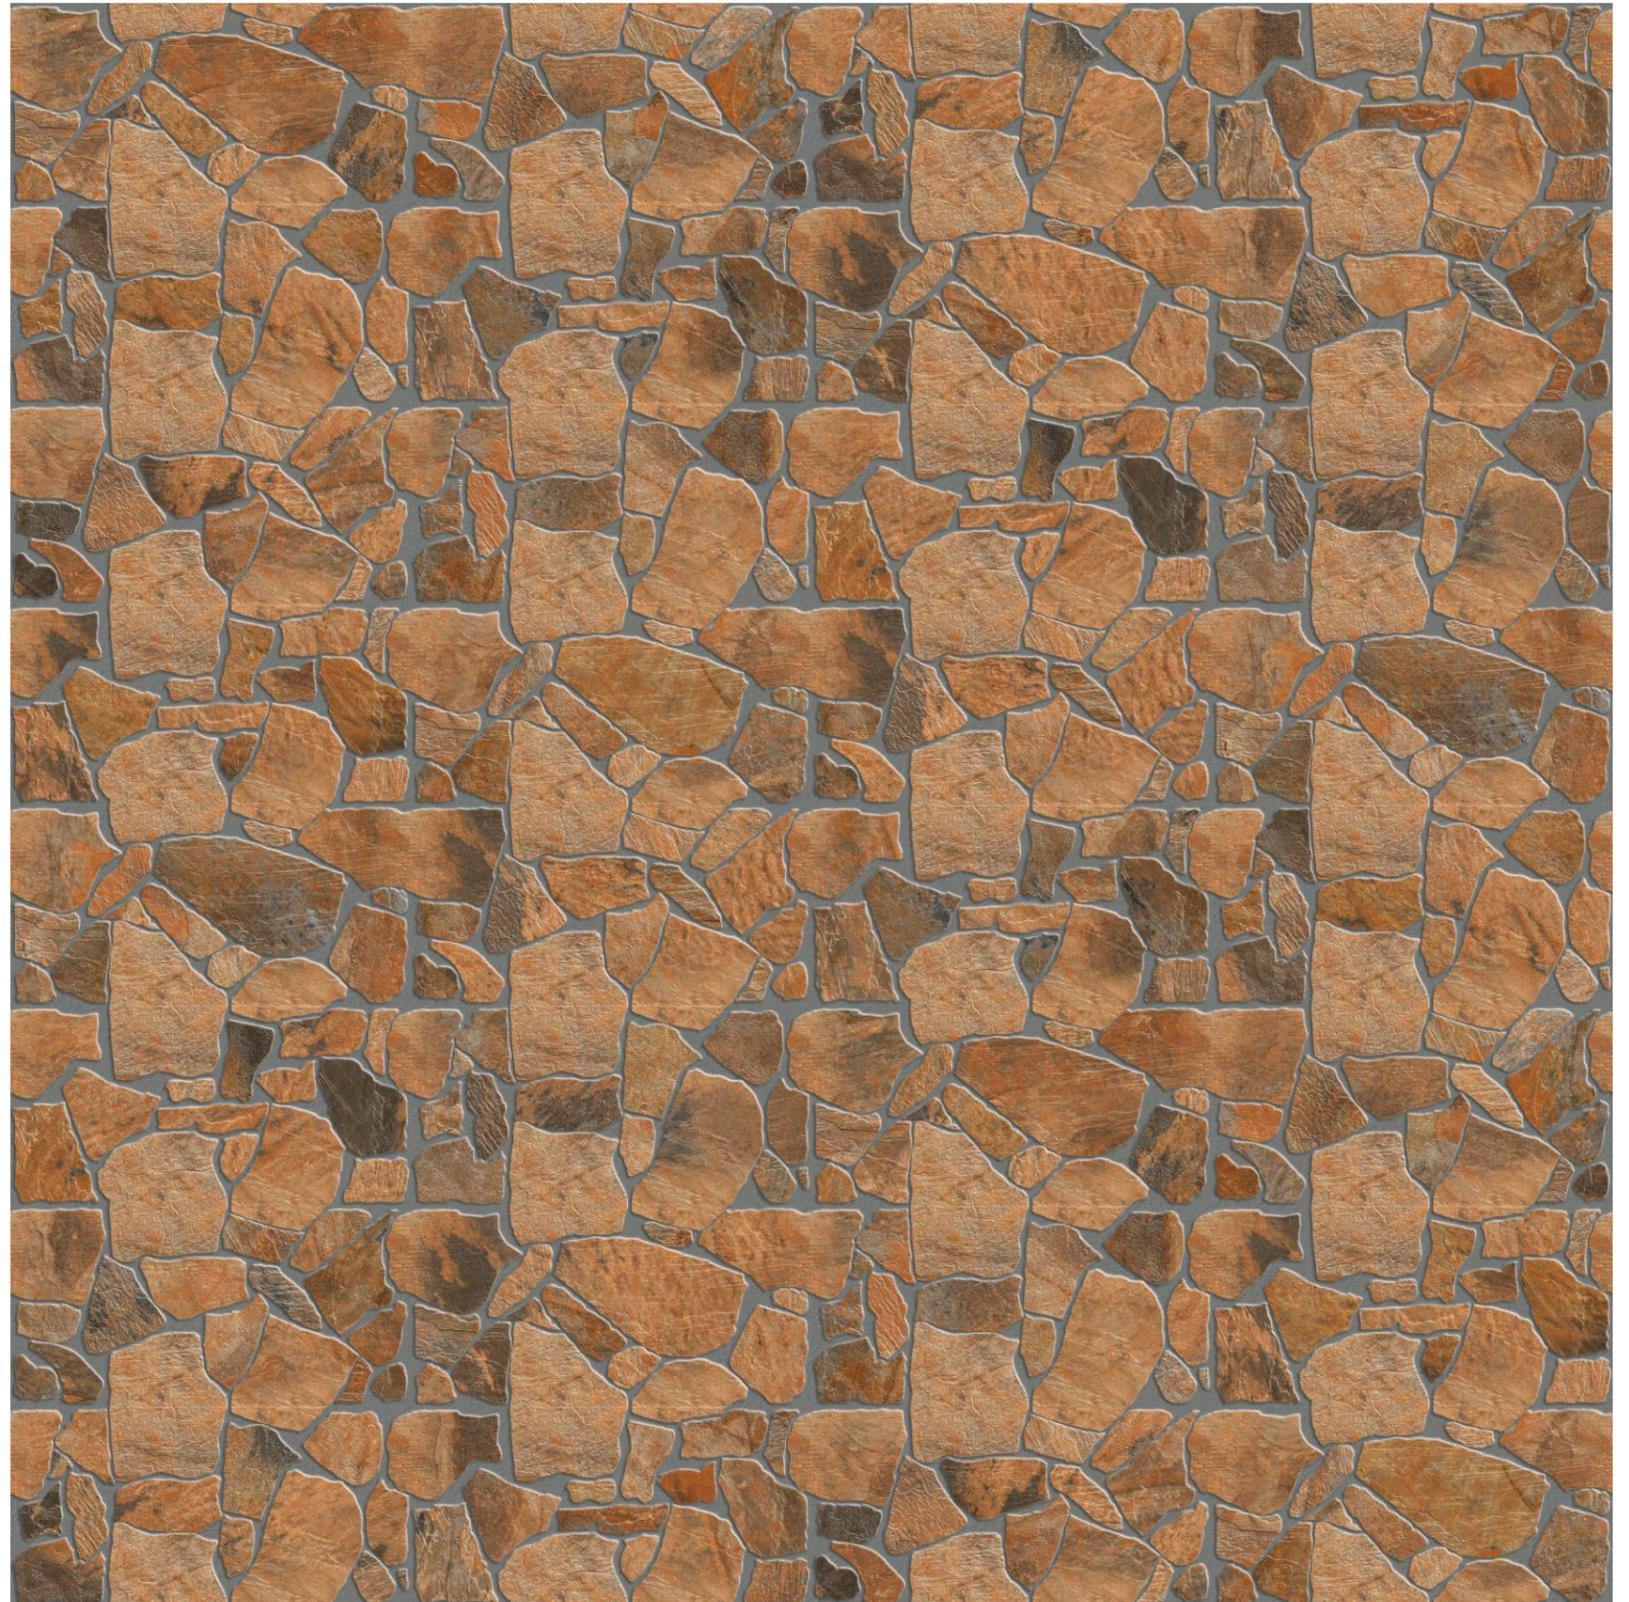



DESIGN : **ROCA BROWN**
SIZE : **300X600MM**
FINISH : **RUSTIC MATT**
RANDOM : **32**





ROCA GRECK



**300X
600MM**

**RUSTIC
MATT FINISH**




**12MM
THICKNESS**

**32
RANDOM**

PACKAGING DETAILS :

PCS PER BOX	WEIGHT PER BOX	AREA COVERAGE	BOX PER PALLET
4 Pcs.	18 kg. (Approx)	0.72 sqm./per box	72

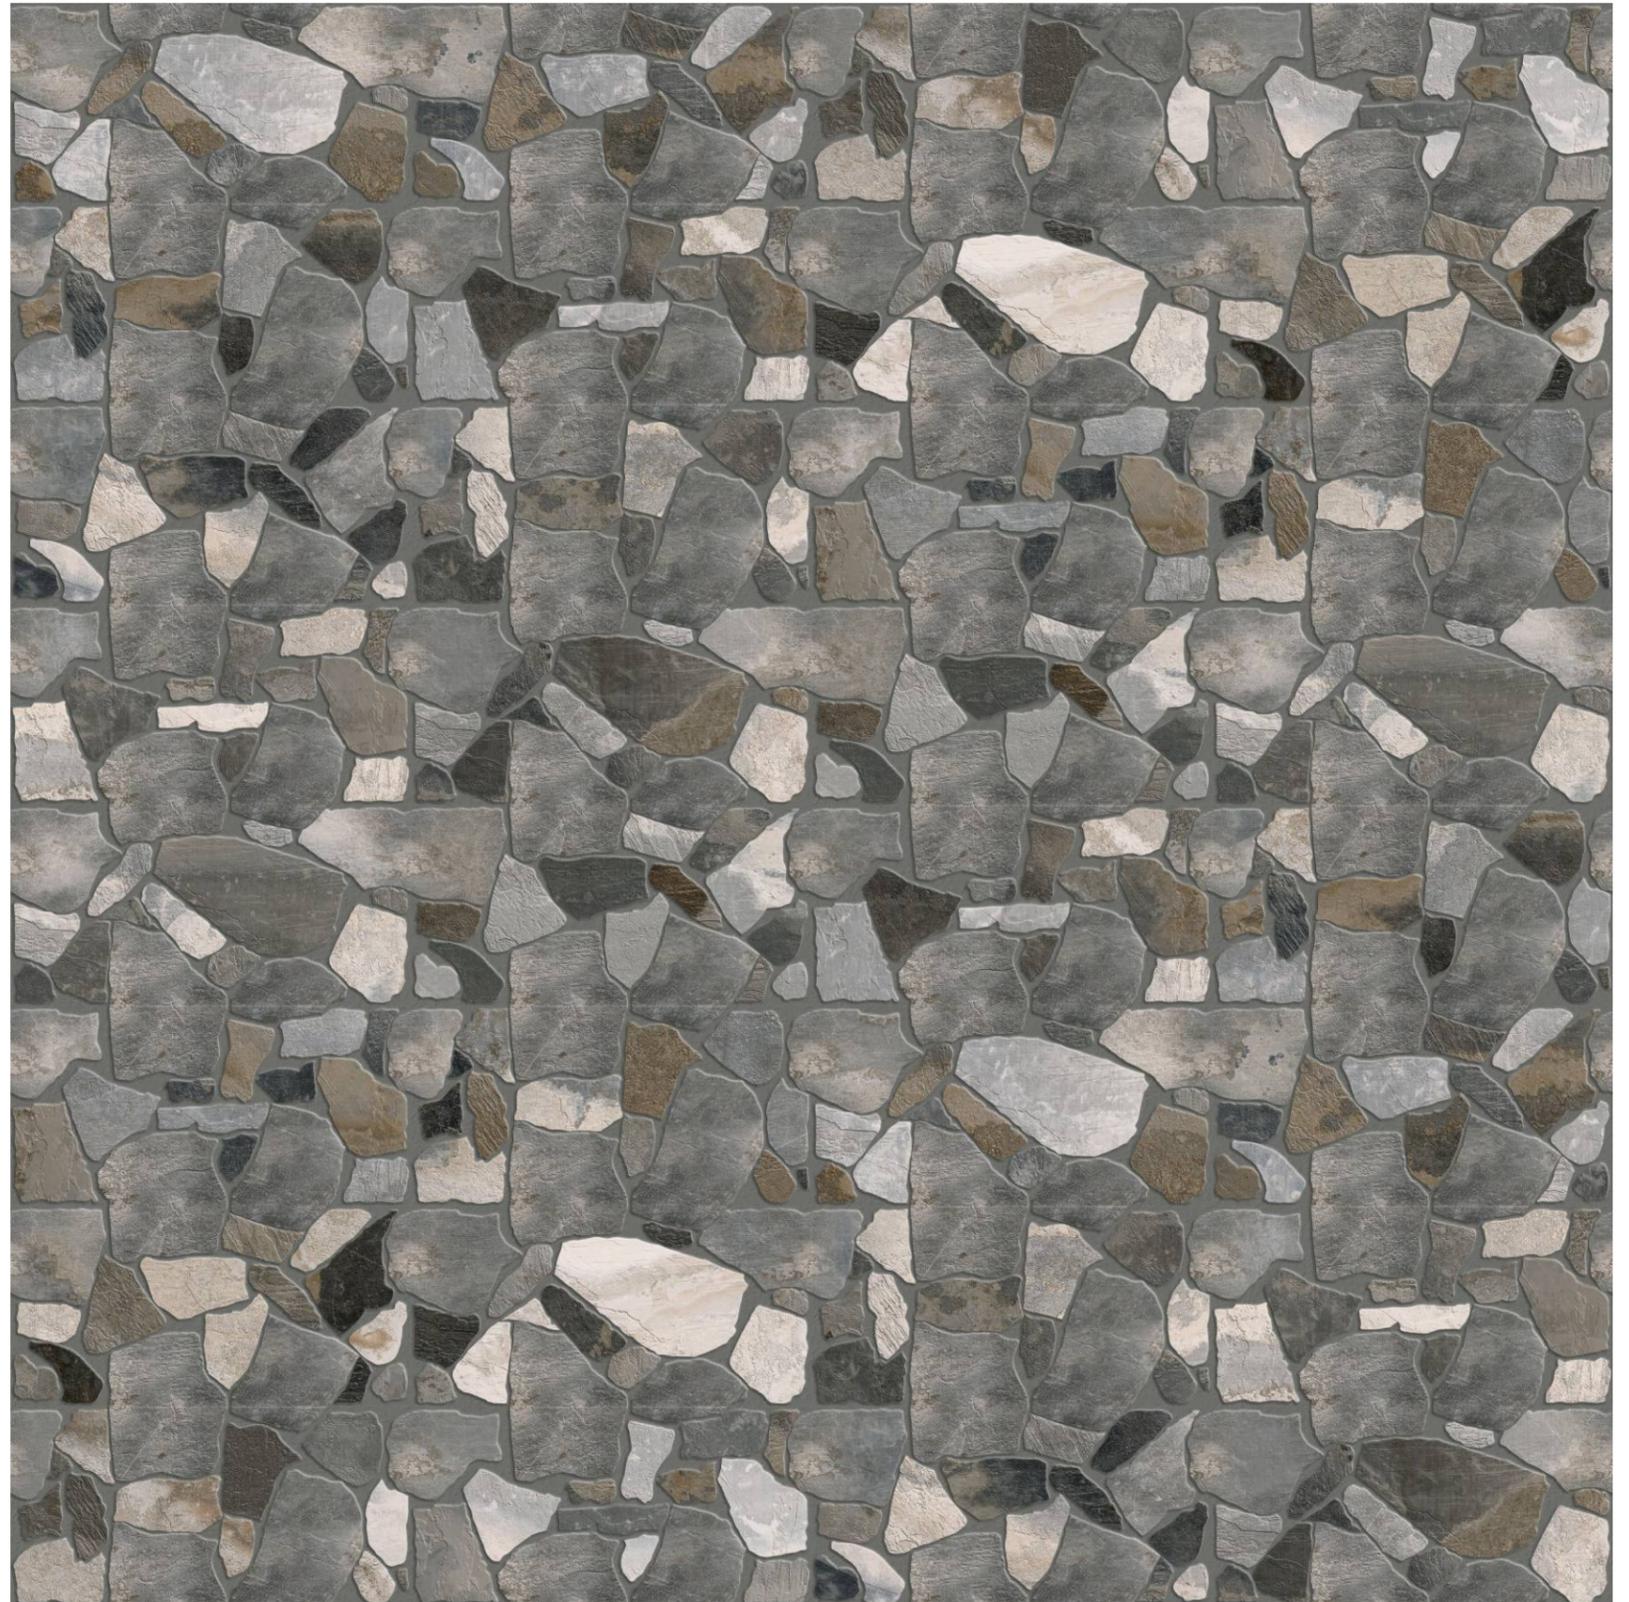





DESIGN : **ROCA GRECK**
SIZE : **300X600MM**
FINISH : **RUSTIC MATT**
RANDOM : **32**





ROCA GREY

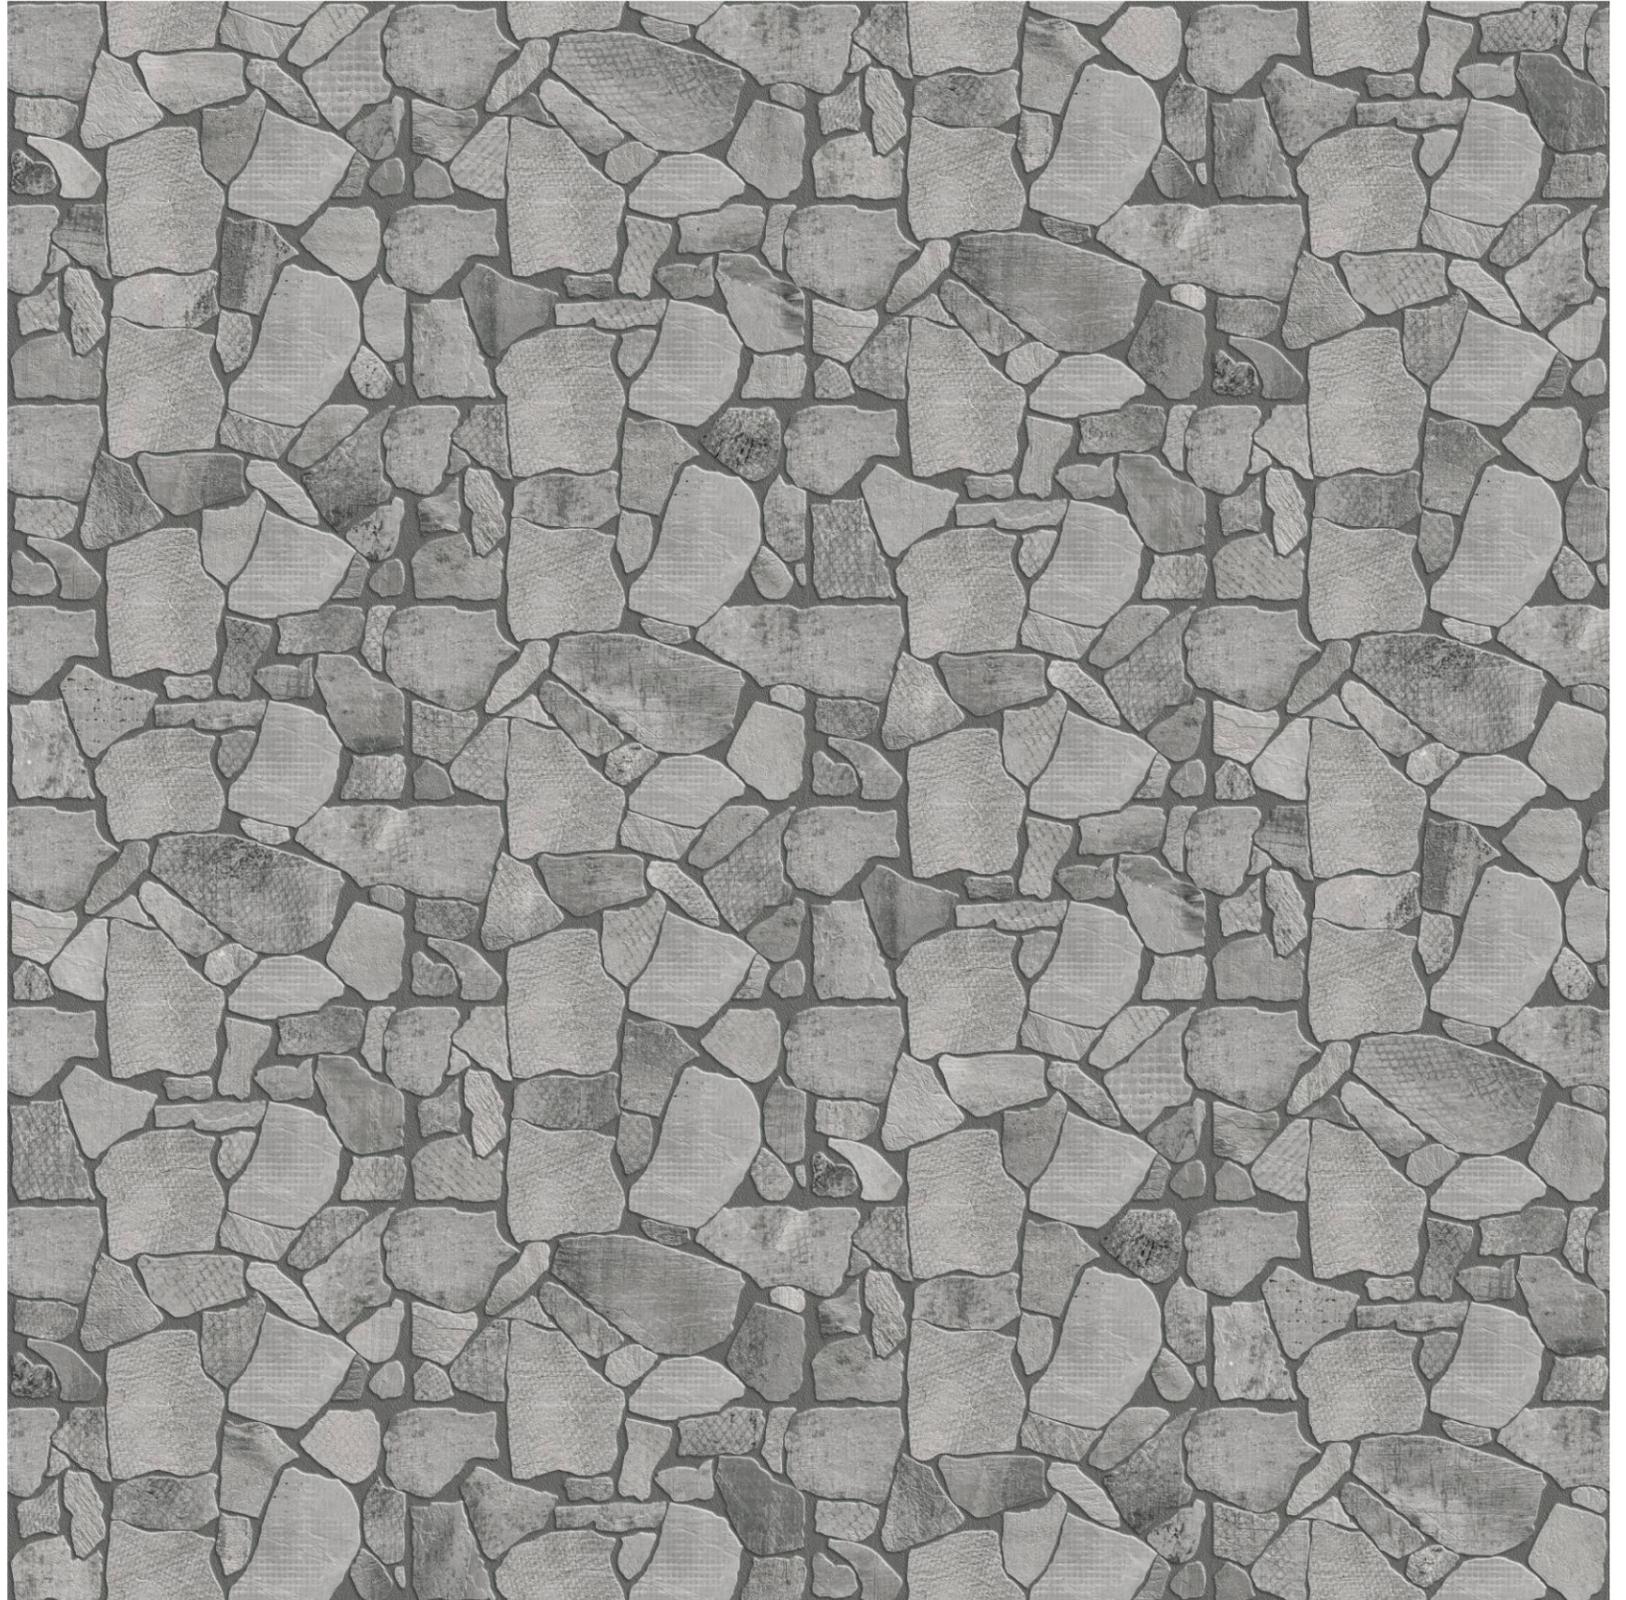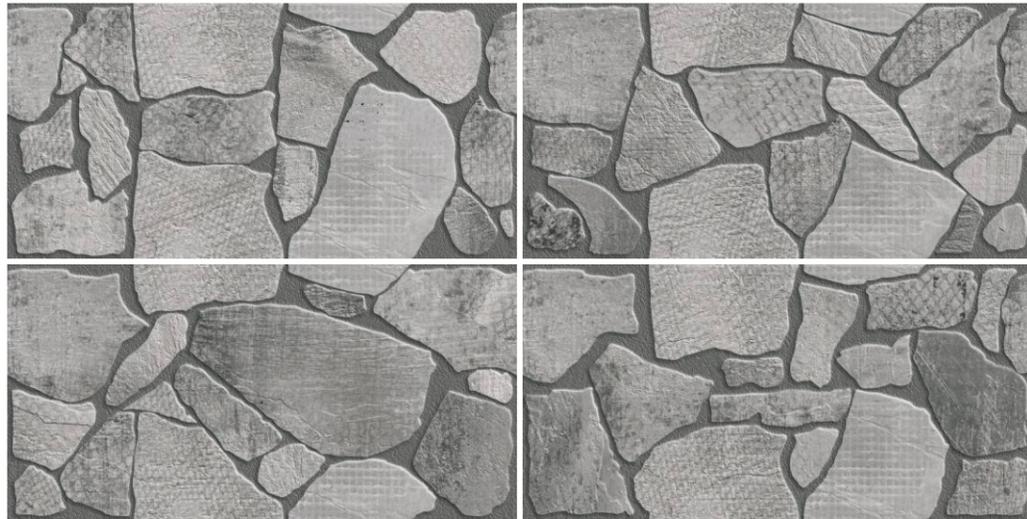

**300X
600MM**

**RUSTIC
MATT FINISH**



**12MM
THICKNESS**

**32
RANDOM**

PACKAGING DETAILS :

PCS PER BOX	WEIGHT PER BOX	AREA COVERAGE	BOX PER PALLET
4 Pcs.	18 kg. (Approx)	0.72 sqm./per box	72



DESIGN : **ROCA GREY**
SIZE : **300X600MM**
FINISH : **RUSTIC MATT**
RANDOM : **32**





ROCA GRIS



**300X
600MM**

**RUSTIC
MATT FINISH**



**12MM
THICKNESS**

**32
RANDOM**

PACKAGING DETAILS :

PCS PER BOX	WEIGHT PER BOX	AREA COVERAGE	BOX PER PALLET
4 Pcs.	18 kg. (Approx)	0.72 sqm./per box	72






DESIGN : **ROCA GRIS**
SIZE : **300X600MM**
FINISH : **RUSTIC MATT**
RANDOM : **32**





ROCA MOSS

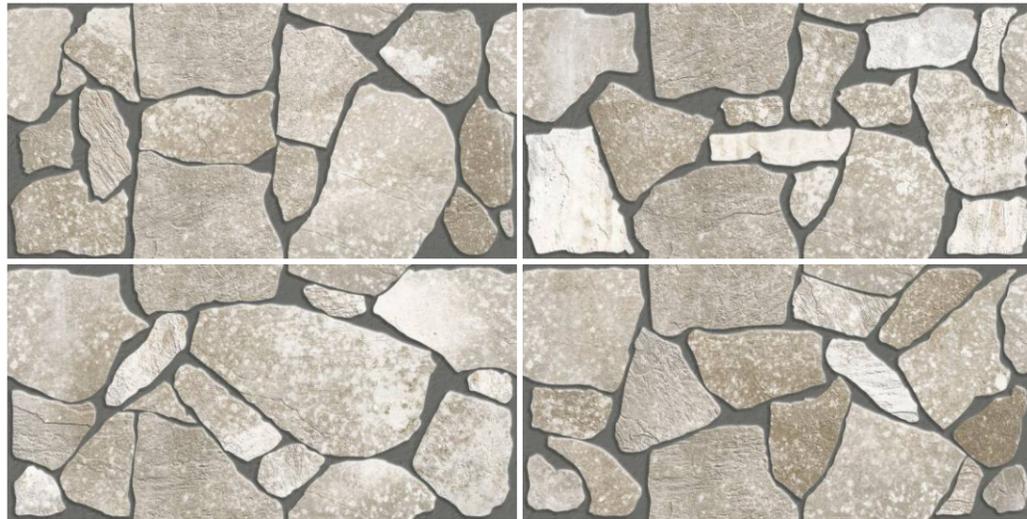

**300X
600MM**

**RUSTIC
MATT FINISH**




**12MM
THICKNESS**

**32
RANDOM**

PACKAGING DETAILS :

PCS PER BOX	WEIGHT PER BOX	AREA COVERAGE	BOX PER PALLET
4 Pcs.	18 kg. (Approx)	0.72 sqm./per box	72

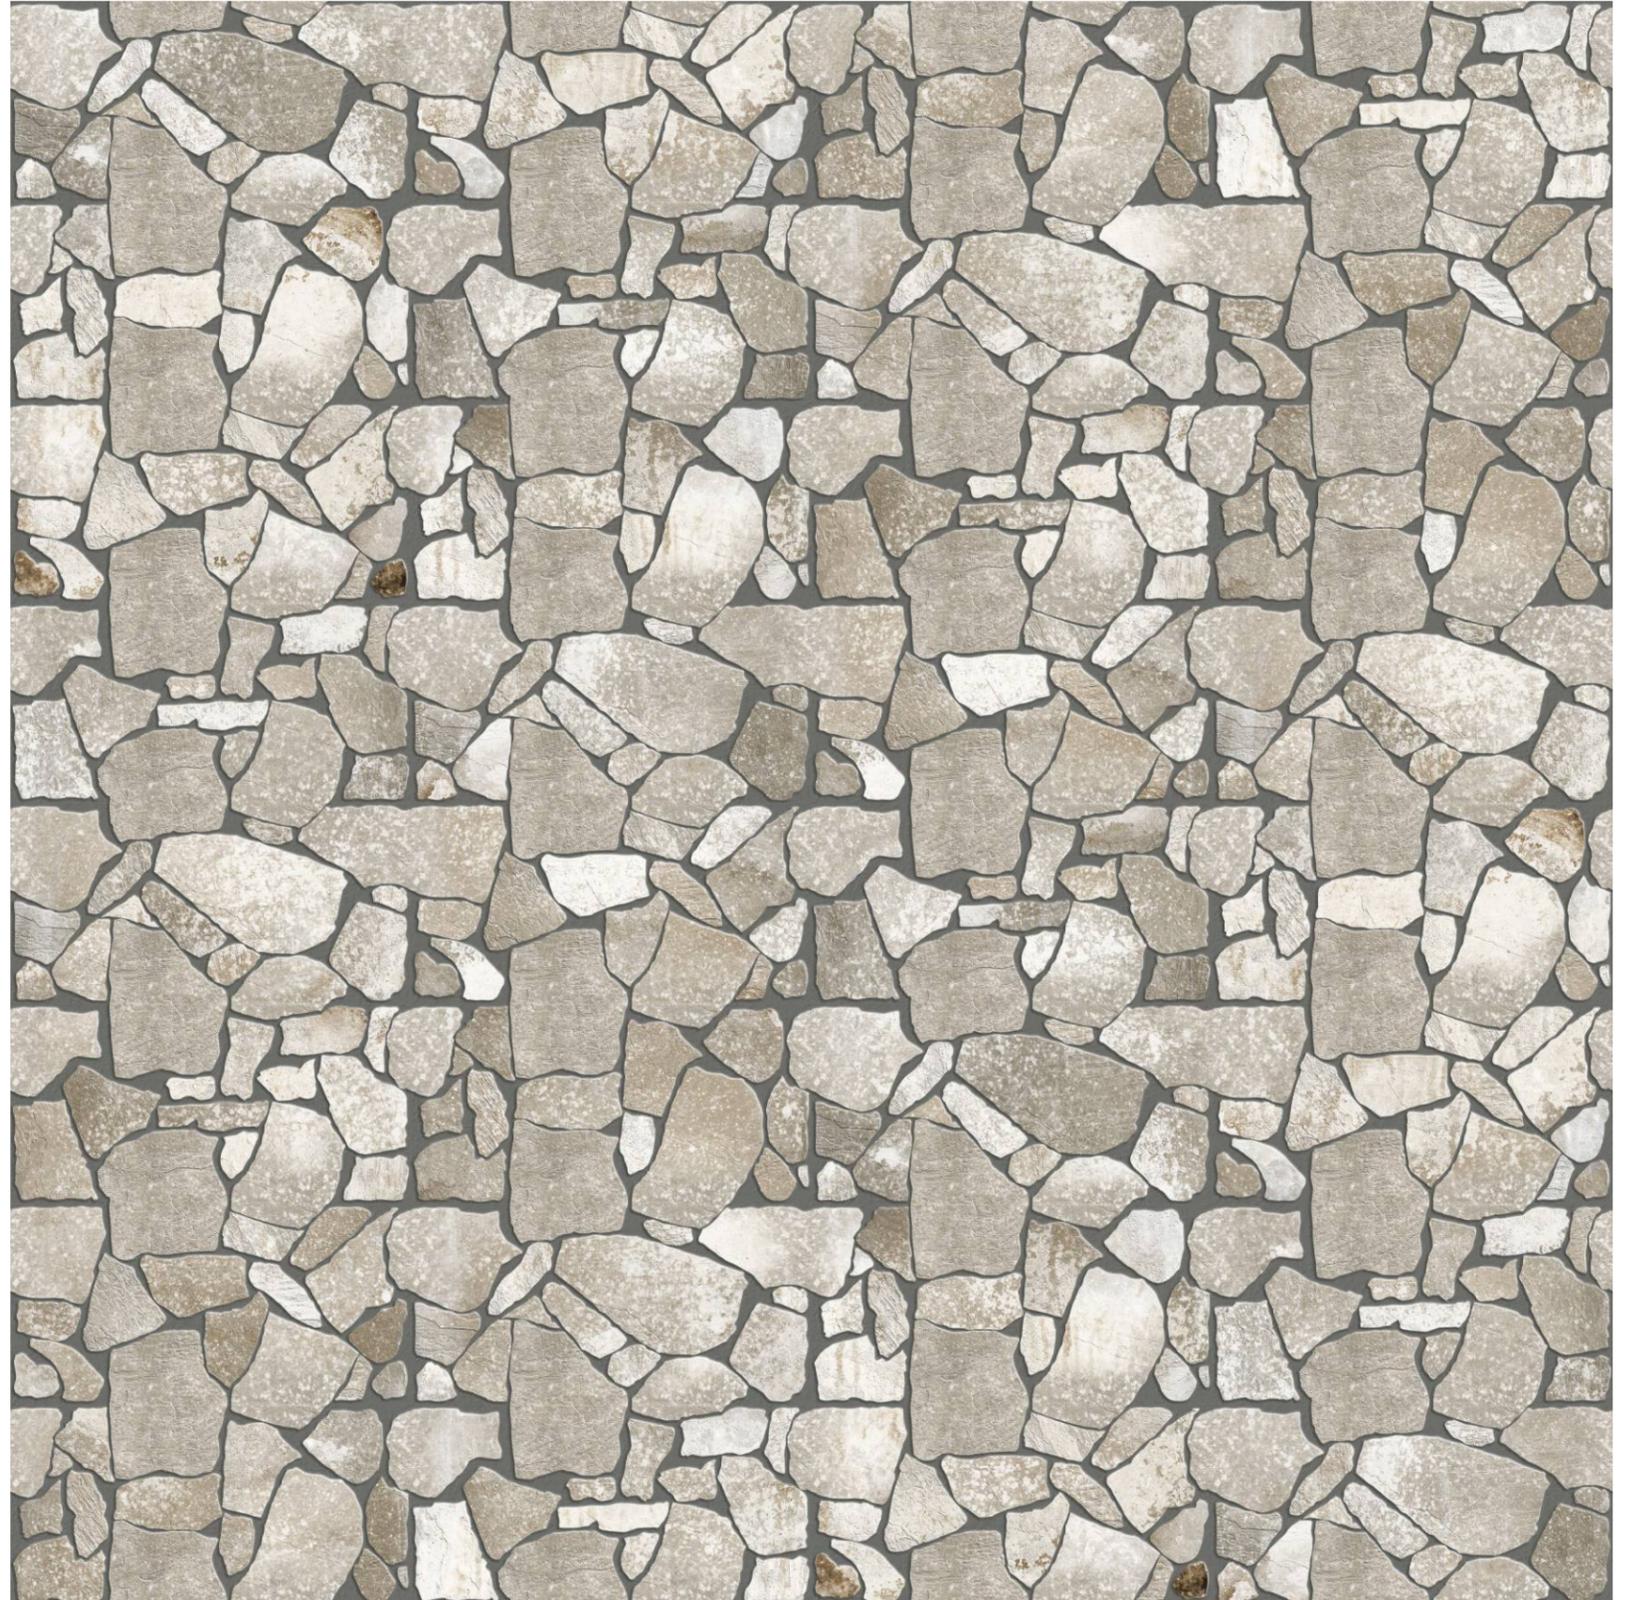




DESIGN : **ROCA MOSS**
SIZE : **300X600MM**
FINISH : **RUSTIC MATT**
RANDOM : **32**





ROCA RUST

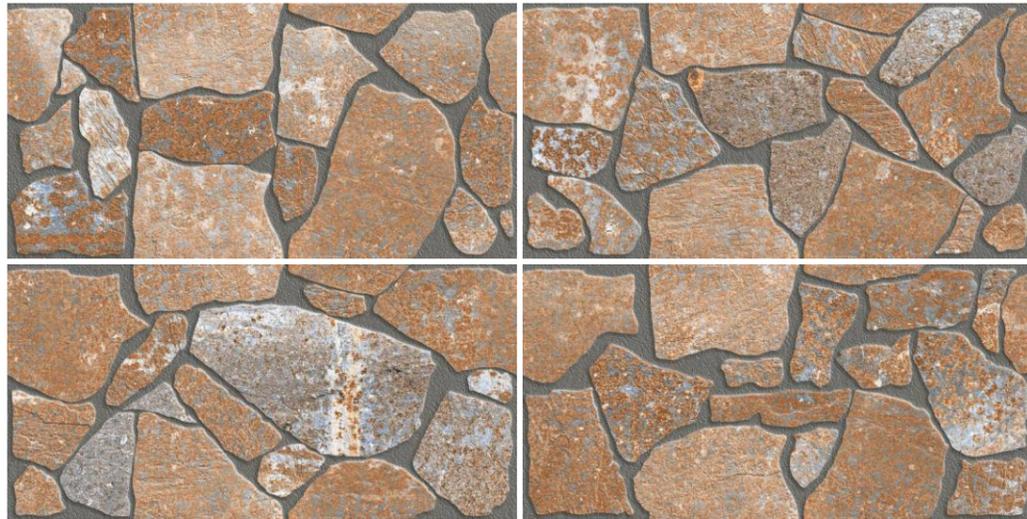

**300X
600MM**

**RUSTIC
MATT FINISH**




**12MM
THICKNESS**

**32
RANDOM**

PACKAGING DETAILS :

PCS PER BOX	WEIGHT PER BOX	AREA COVERAGE	BOX PER PALLET
4 Pcs.	18 kg. (Approx)	0.72 sqm./per box	72

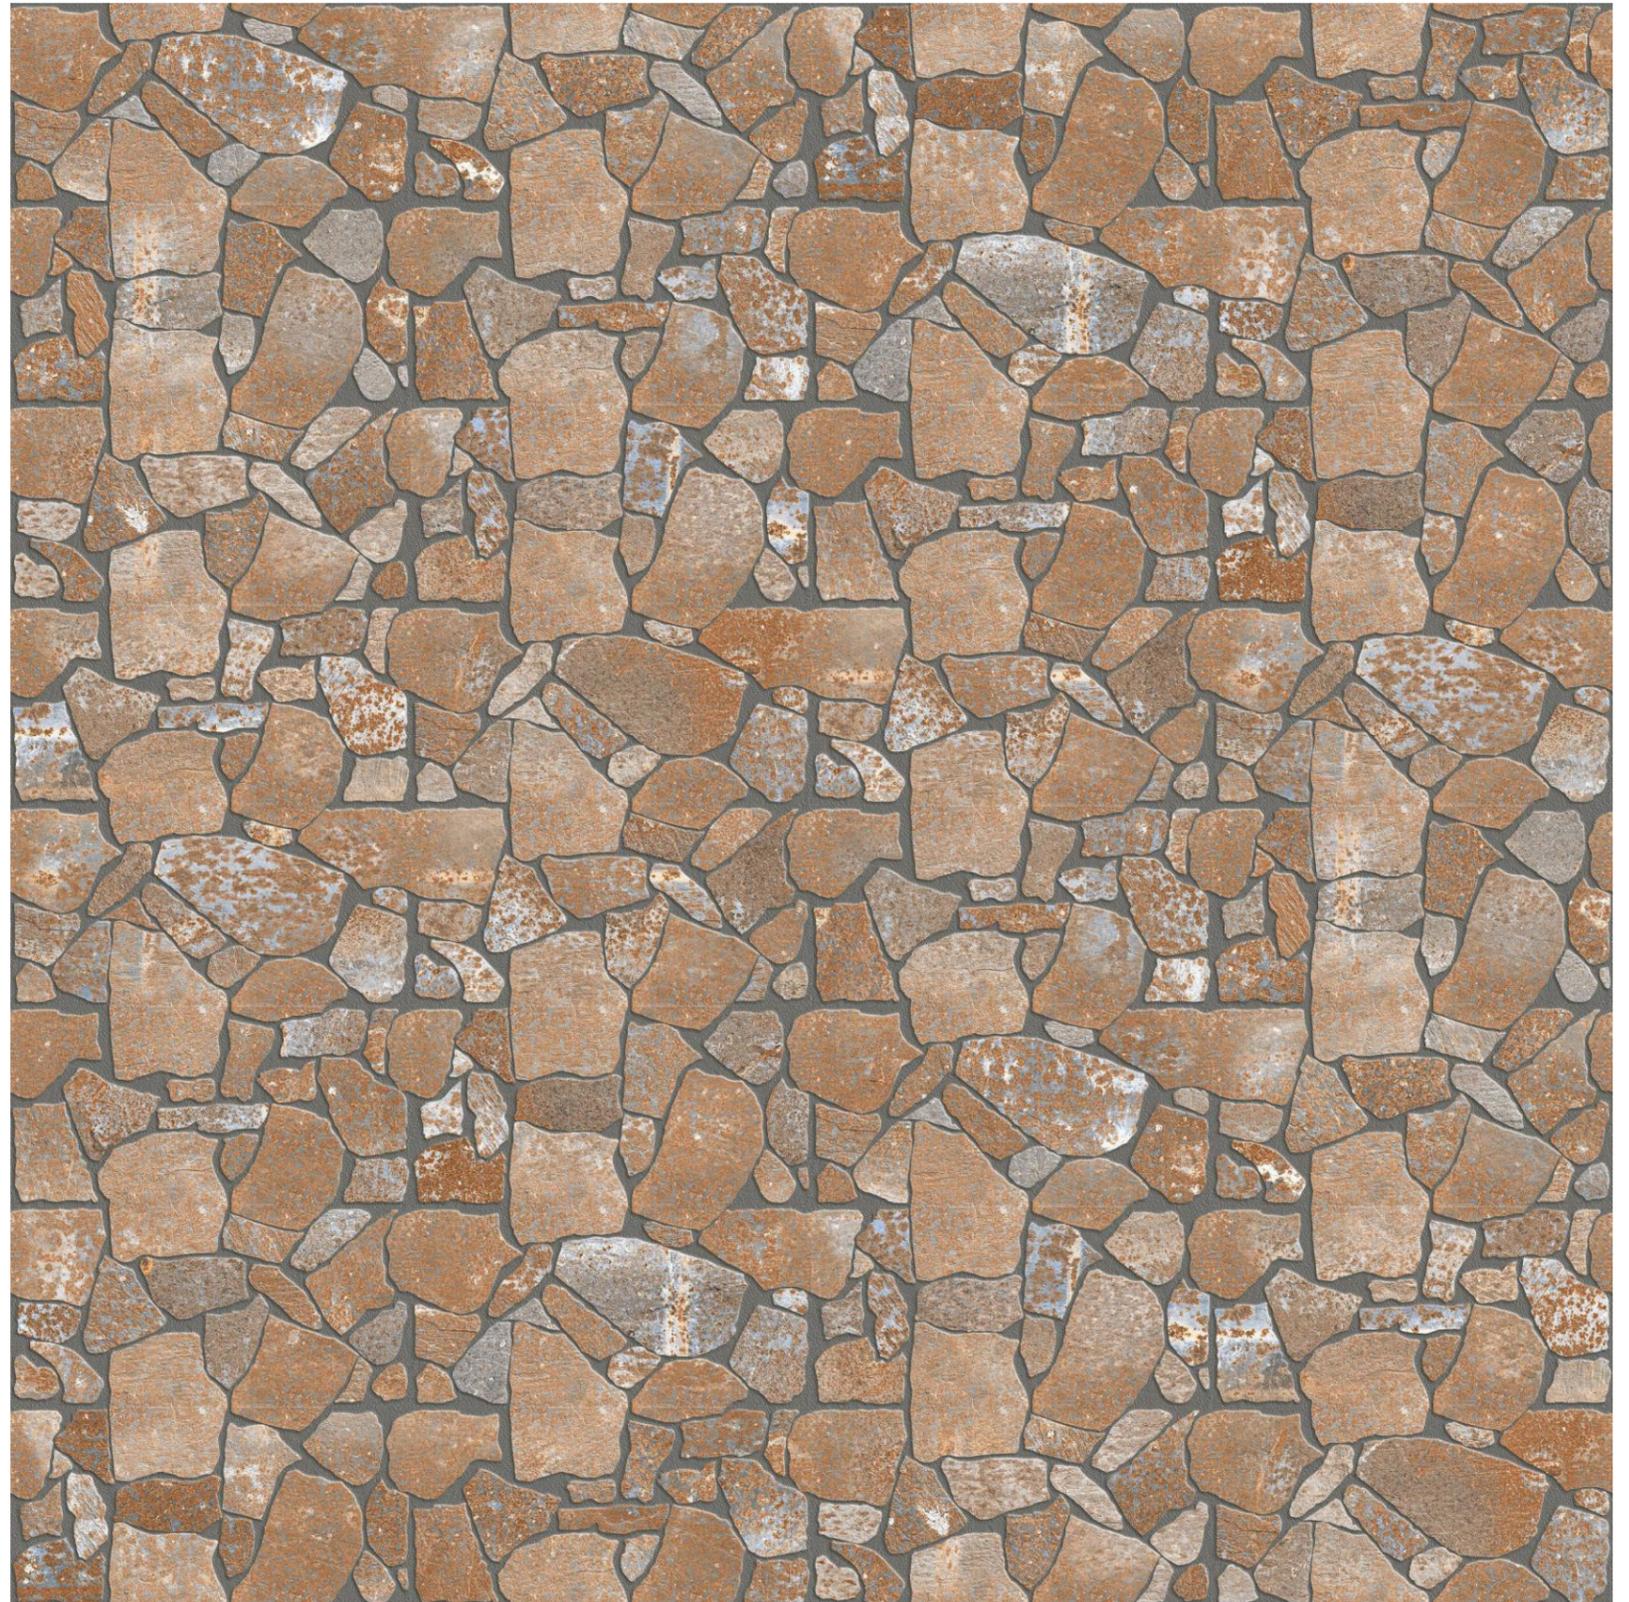




DESIGN : **ROCA RUST**
SIZE : **300X600MM**
FINISH : **RUSTIC MATT**
RANDOM : **32**





ROCA TANGRIS

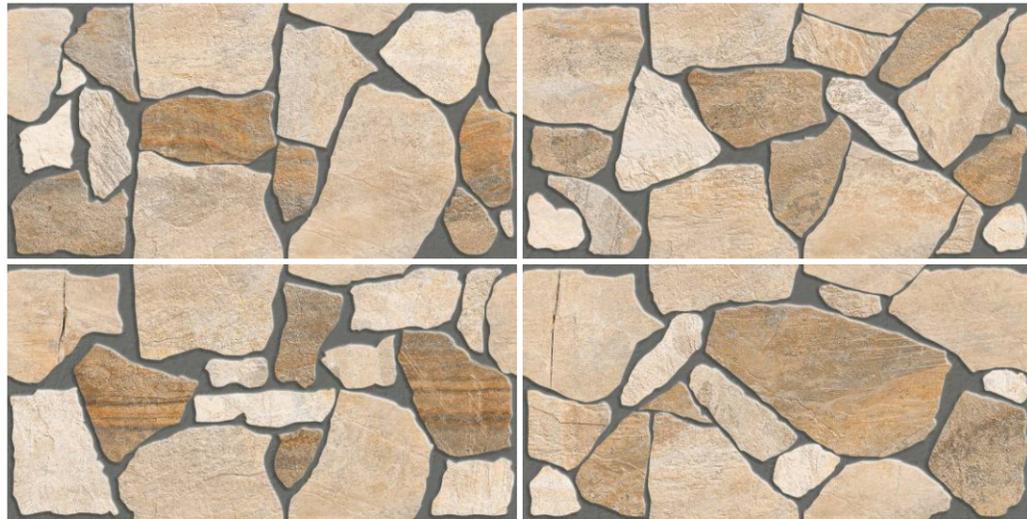

**300X
600MM**

**RUSTIC
MATT FINISH**



**12MM
THICKNESS**

**32
RANDOM**

PACKAGING DETAILS :

PCS PER BOX	WEIGHT PER BOX	AREA COVERAGE	BOX PER PALLET
4 Pcs.	18 kg. (Approx)	0.72 sqm./per box	72





DESIGN : **ROCA TANGRIS**
SIZE : **300X600MM**
FINISH : **RUSTIC MATT**
RANDOM : **32**



EXPORTS WORLDWIDE

U.S. TERRITORY

-  MEXICO
-  CANADA

ASIAN TERRITORY

-  SRILANKA
-  MAURATIUS
-  AUSTRALIA
-  VIETNAME
-  TAIWAN
-  THAILAND
-  AFGHANISTAN
-  BANGLADESH
-  NEPAL

SOUTH AMERICA / LATIN AMERICA TERRITORY

-  BOLIVIA
-  CHILE
-  COLOMBIA
-  COSTARICA
-  BDOMINICAN REPUBLIC
-  GUATEMALA
-  HAITI
-  HONDURAS
-  PANAMA
-  PERU
-  PUERTO RICO
-  EL SALVADOR
-  VENEZUELA
-  JAMAICA
-  CURACAO
-  NICARAGUA
-  TOBAGO
-  BURKINA FASO
-  TRINIDAD & TOBAGO
-  ECUADOR

EUROPE & BALCON TERRITORY

-  ALBANIA
-  KOSOVO
-  MACEDONIA
-  GREECE
-  SPAIN

NORTH AFRICA TERRITORY

-  LIBYA
-  NIGERIA
-  SOUTH AFRICA
-  MOROCO
-  ISRAEL
-  TUNISIA
-  SURINAME

MIDDLE EAST TERRITORY

-  BAHRAIN
-  IRAQ
-  KUWAIT
-  OMAN
-  QATAR
-  SAUDI AREBIA
-  LEBANON
-  JORDAN
-  SYRIA



TECHNICAL SPECIFICATIONS



TECHNICAL SPECIFICATIONS - GLAZED VITRIFIED TILES (GROUP Bla)

CHARACTERISTIC	TEST METHOD	INTERNATIONAL STD ISO 13006/EN 176 GROUP BLA	PORCELAIN VALUE
DIMENSION & SURFACE QUALITY			
Deviation In Length	ISO-10545-2	±0.6%	±0.2%
Deviation In Thickness	ISO-10545-2	±5%	±4%
Straightness Of Sides	ISO-10545-2	±0.5%	±0.2%
Rectangularity	ISO-10545-2	±0.6%	±0.2%
Surface Flatness	ISO-10545-2	±0.5%	±0.2%
PHYSICAL & THERMAL PROPERTIES			
Water Absorption	ISO-10545-3	<0.5%	<0.2%
Mohs Hardness	EN-101	Min.3	Min.3
Flexural Strength	ISO-10545-4	>35 N/mm ²	>40N/mm ²
Skid Resistance (Friction Coefficient)	ISO-10545-17	-	<0.2 (R9)
Breaking Strength	ISO-10545-11	>1113 N	>1800 N
Frost Resistance	ISO-10545-12	Frost Proof	Frost Proof
Thermal Shock Resistance	ISO-10545-9	No Damage	No Damage
Moisture Expansion	ISO-10545-10	NIL	NIL
Resistance to Surface Abrasion	ISO-10545-7	-	PEI III & IV
CHEMICAL PROPERTIES			
Chemical Resistance	ISO-10545-13	No Damage	No Damage
Color Resistance	ISO-10545-16	No Damage	No Damage
Stain Resistance	ISO-10545-14	Resistant	Resistant

TECHNICAL SPECIFICATIONS - CERAMIC TILES

CHARACTERISTIC	TEST METHOD	INTERNATIONAL STD ISO 13006/EN 176 GROUP BLA	CERAMIC VALUE
DIMENSION & SURFACE QUALITY			
Deviation In Length	ISO-10545-02	±0.20%	±0.10%
Deviation In Thickness	ISO-10545-02	±7.00%	±0.10%
Straightness Of Sides	ISO-10545-02	±0.15%	±0.10%
Rectangularity	ISO-10545-02	±0.20%	±0.15%
Surface Flatness	ISO-10545-02	±0.30%	±0.20%
PHYSICAL & THERMAL PROPERTIES			
Water Absorption	ISO-10545-03	<10%	16±2%
Mohs Hardness	EN-101	Min. Class 3	Compliant
Flexural Strength	ISO-10545-04	R >15 N/mm ²	Compliant
Skid Resistance (Friction Coefficient)	ISO-10545-08	<9.0 x 10 ⁻⁶ EC ⁻¹	Compliant
Breaking Strength	ISO-13630-06	600 Min.	Compliant
Frost Resistance	ISO-13630-03	0.04 mm/M Max.	Compliant
Thermal Shock Resistance	ISO-10545-09	Min. 10 Cycles	Compliant
Moisture Expansion	ISO-13630-03	0.04 mm/M Max.	Passed 10 Cycle
Resistance to Surface Abrasion	ISO-13630-14	0.55 Min.	4 Cycle Passed
CHEMICAL PROPERTIES			
Chemical Resistance	ISO-10545-13	As per Mfg.	No visible effect
Color Resistance	ISO-10545-13	Class AA Min.	Compliant
Stain Resistance	ISO-10545-14	Class 1 Min.	Compliant



CORPORATE OFFICE:

Edan Ceramic City, Opp. Honest Hotel,
8-A NH, At. Lalpar - 363642, Dist. Morbi, Gujarat - (INDIA)

E-mail : export@reyceramic.com | **Mob.:** +91 90999 06545

GROUP OF COMPANIES:

REY CERA CREATION PVT. LTD.

8-A, N.H , Sartanpar Road, Opp. Kevin Ceramic,
At. Ratavirda, Tal. Wankaner, Dist. Morbi (Gujrat) India.

SIMBEL CERAMIC PVT. LTD.

8-A, National Highway, Dhuva-Matel Road,
At. Lakaddhar, Morbi - 363 642, Gujarat, India

ADORATION CERAMICA PVT.LTD.

8-A, N.H , Virpar-Bhimguda Road, Opp. Armano Vitrified,
Ta. Vankaner, Dist. Morbi (Gujrat) India.



WEB: www.reycera.com

Join us on: | [f](#) [@](#) [t](#) [in](#)