



600X1200MM
GLOSSY FINISH

VOL-2

www.reycera.com

About us!

Rey Cera is one of the cutting edges and leading manufacturers and exporters of ceramic and tiles items. We work innovatively towards serving the client essentials and necessities as our top-notch requirement and provide the one-stop answer for redesigning and planning homes and workplaces.

We are dutiful to hand out the dealers, purchasers, and clientele at the highest significance and work in a row to keep informed the tiles and ceramic catalogue at monthly intervals with vividness and distinction by upholding the prerequisites in easy reach.

ReyCera is compact and stylish outlook tile designs as it comprises chosen normal materials. Because of its phenomenal highlights as simple support and low spongy properties, it needs rigid, sterile prerequisites. Products outlook by colored pigments and squashed mirrors, superior polyester tar gives the great appearance to the area. Our products are a perfect decision for business, private, or industry reason for a stylish outlook. Newness and headways, in examples, will give a better region outlook.

20+

YEAR OF EXPERIENCE

57+

EXPORT COUNTRY

800+

HAPPY CUSTOMERS

100%

QUALITY





“
**Exceptional Surfaces
Multifarious Application
Possibilities!**

From interior to exterior coverings and floors, from Heavy Duty such as Malls, Airports & Shops we have landed at Habitat, a proposal entirely dedicated to All Habitual Spaces an evolution capable of giving shape to design Urban Areas with a strong presence architectural.



Application Areas



UNMATCHED ELEGANCE AND STRENGTH

These surfaces provide an extra edge with feature-rich attributes like resistance to weather and chemicals, easy-to-clean and maintain, abrasion proof, stain and scratch resistant that do not require special care.

Create your envisioned ambiance for a hassle-free lifestyle.

TECHNICAL FEATURES



Scratch and
Abrasion Resistant



Resistant to
UV Rays



Easy to Clean
Surface



Resistant to
Fire and Heat



Frost Resistant
Surface



Flatness and
Stability Over Time



Impact Resistant
Surface



Water Resistant
Surface



Stain Resistant
Surface



Hygienic and
Suitable for Contact
with Food



Resistant to
Chemicals, Acids,
Bases, and Solvents



Resistant to
Mould, Mildew,
And Fungus






1st Indian ceramic industry to introduce patented **E N D M A T C H** concept across the globe



INTELLECTUAL
PROPERTY INDIA
PATENTS | DESIGNS | TRADE MARKS
GEOGRAPHICAL INDICATIONS



1ST
TIME
IN
WORLD

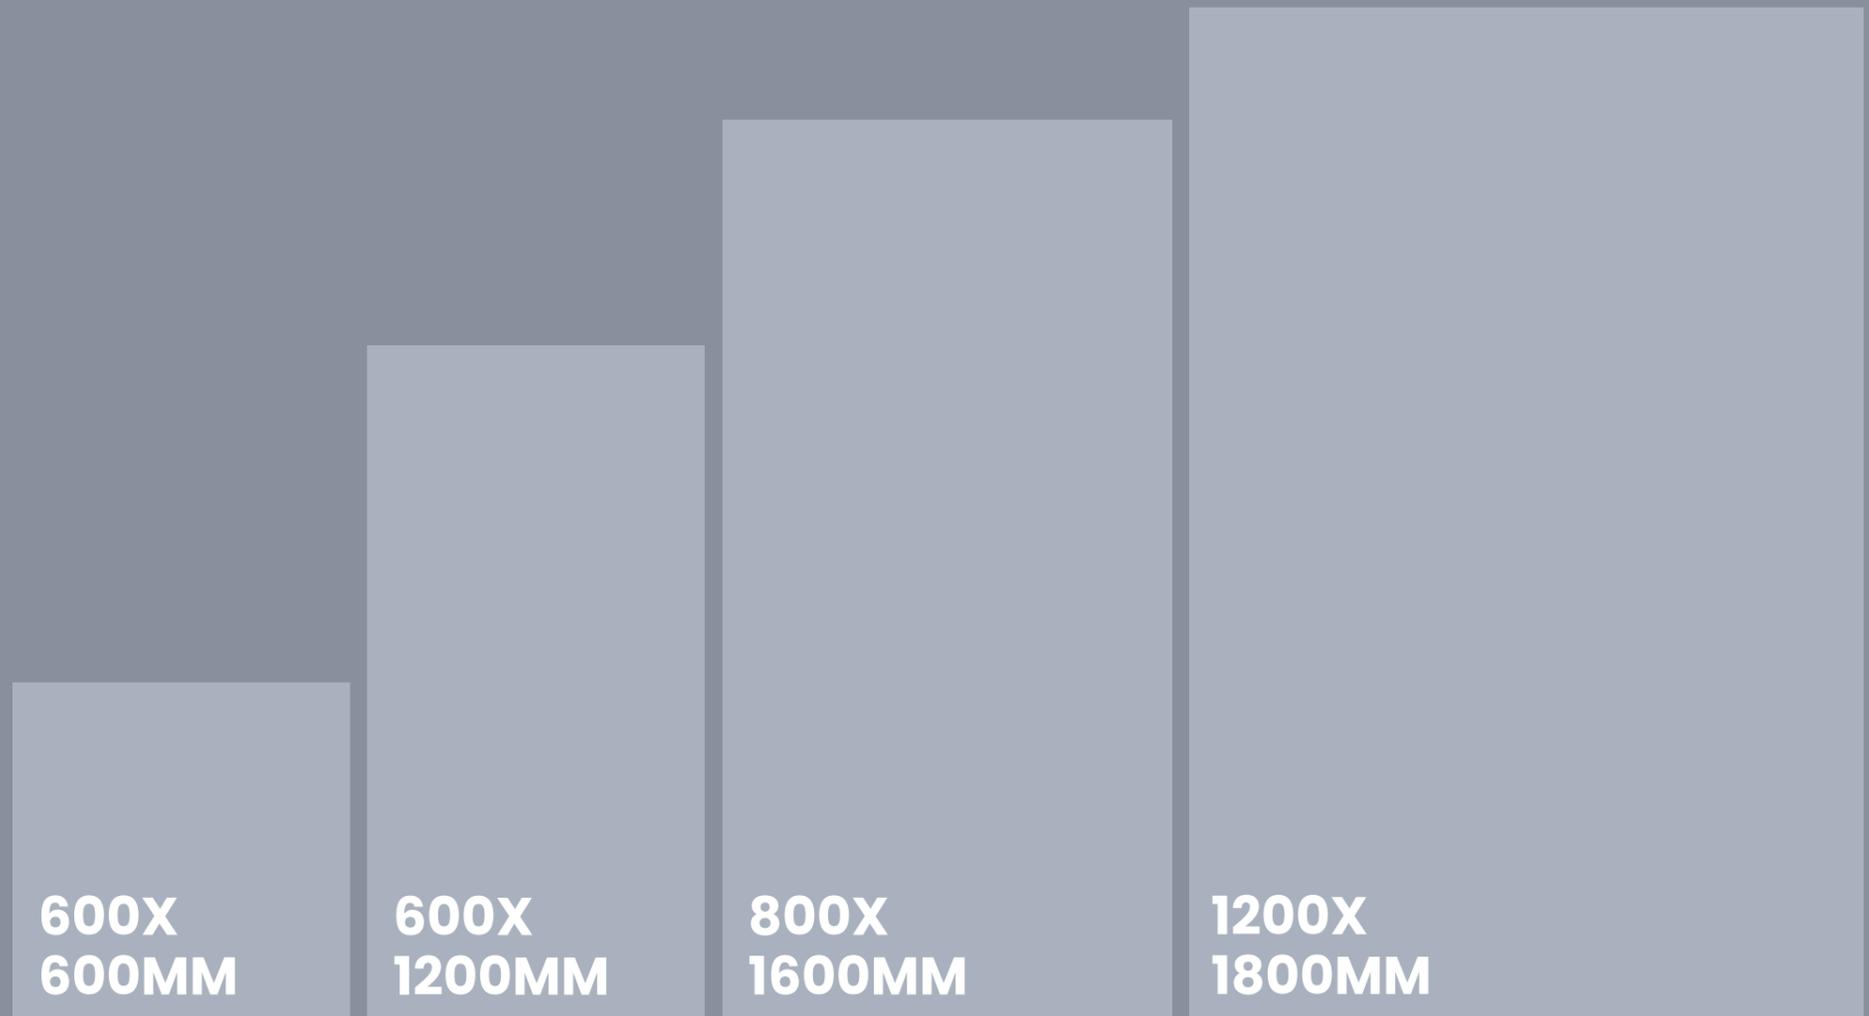

**ADVIK
ROSSO**

 **9mm
Thickness**

60 x 120 cm


high
strength


maintenance
free


eco
friendly


random
designs


< 0.08% water
absorption


chemical
resistant





**ADVIK
TAUPE**

 **9mm
Thickness**

60 x 120 cm


high
strength


maintenance
free


eco
friendly


random
designs


< 0.08% water
absorption


chemical
resistant





dwell

BALTIMOR ONZA

↓ 9mm
↑ Thickness

60 x 120 cm

- high strength
- maintenance free
- eco friendly
- random designs
- < 0.08% water absorption
- chemical resistant





BETON CLAY

 **9mm**
Thickness

60 x 120 cm

 high strength

 maintenance free

 eco friendly

 random designs

 < 0.08% water absorption

 chemical resistant





DOVER FONTANA

 9mm
Thickness

60 x 120 cm

-  high strength
-  maintenance free
-  eco friendly
-  random designs
-  < 0.08% water absorption
-  chemical resistant





FERROKER FOREST

 **9mm**
Thickness

60 x 120 cm


high
strength



maintenance
free


eco
friendly


random
designs


< 0.08% water
absorption


chemical
resistant

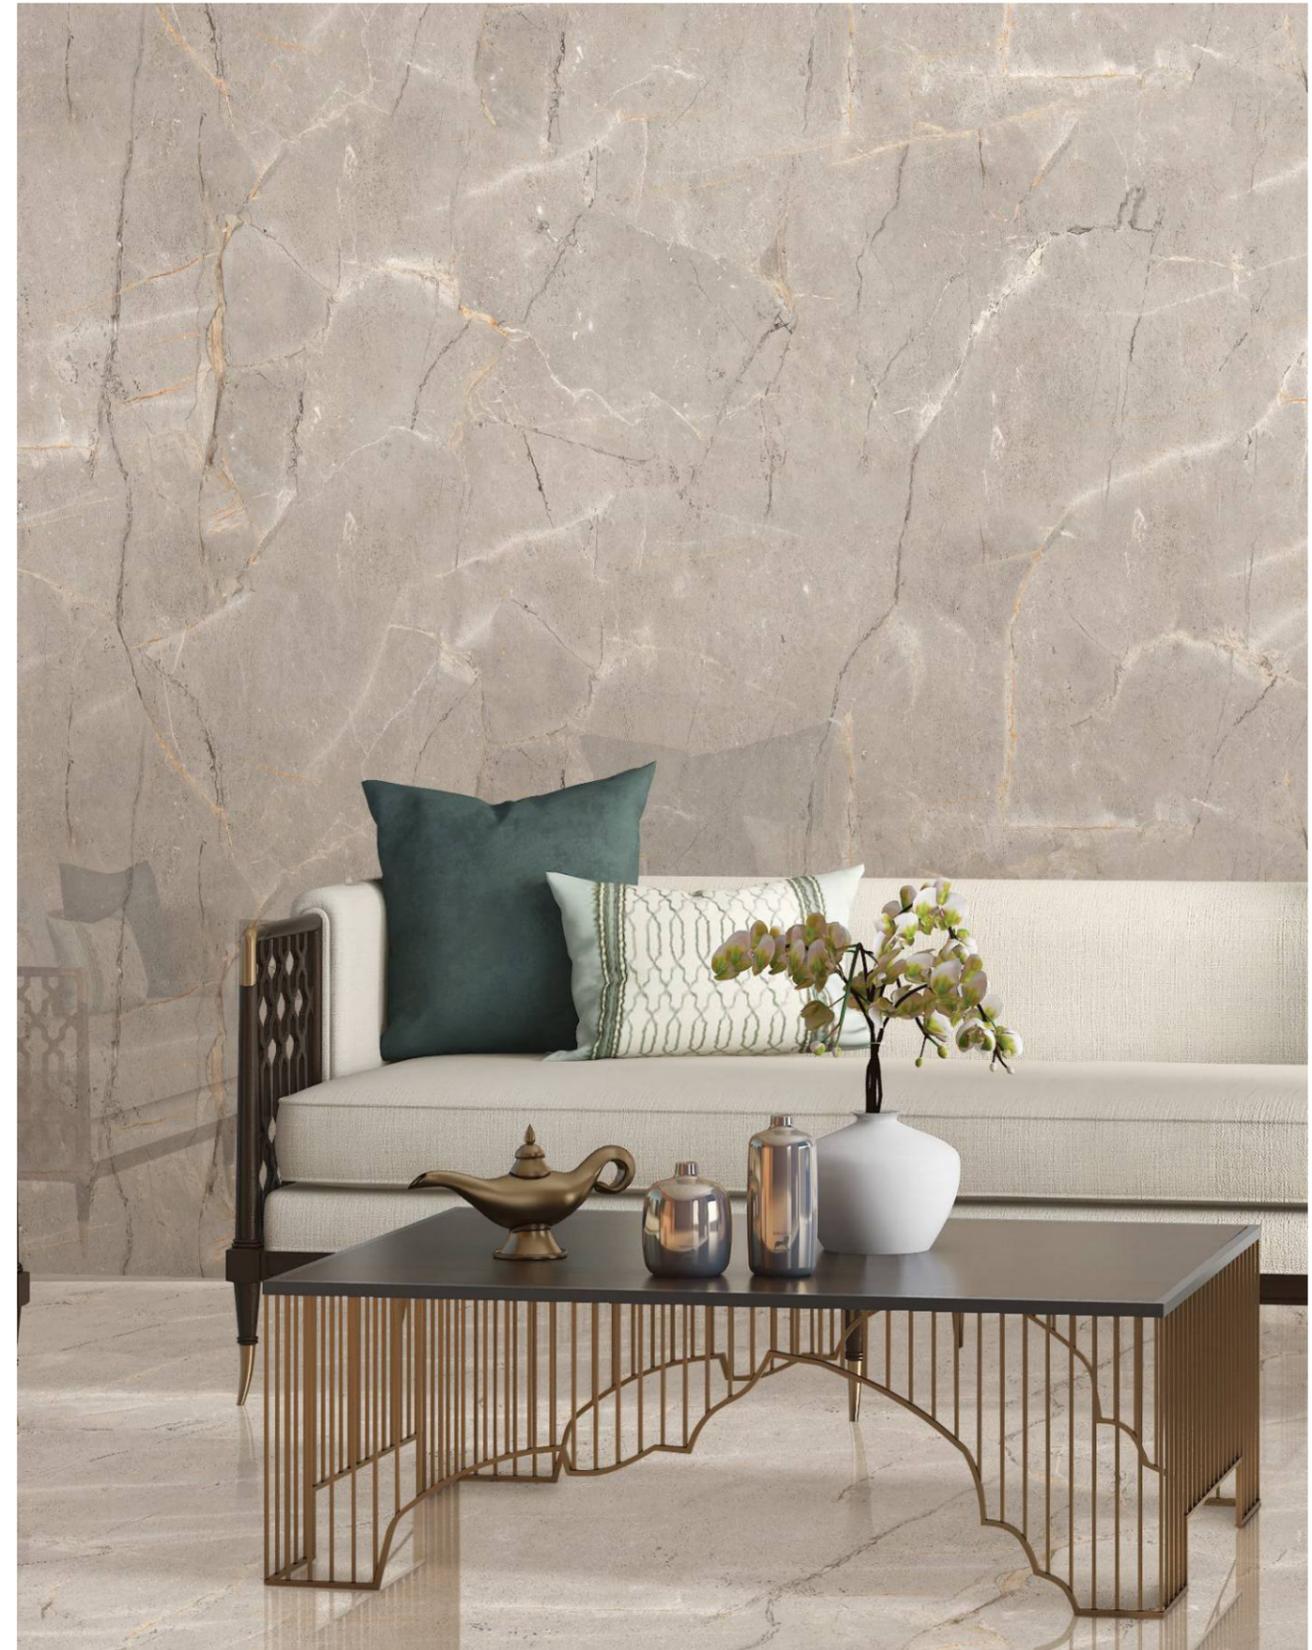



HERIEM LUMINUS

 **9mm**
Thickness

60 x 120 cm


high
strength


maintenance
free


eco
friendly


random
designs


< 0.08% water
absorption


chemical
resistant





HORDIX SILVER

 **9mm**
Thickness

60 x 120 cm

 high strength

 maintenance free

 eco friendly

 random designs

 < 0.08% water absorption

 chemical resistant





**LIEM
ABYSS**

 **9mm
Thickness**

60 x 120 cm

 high strength  maintenance free  eco friendly

 random designs  < 0.08% water absorption  chemical resistant







Octane INFINITO
COLLECTION



LIEM OFERTA

 **9mm**
Thickness

60 x 120 cm

 high strength

 maintenance free

 eco friendly

 random designs

 < 0.08% water absorption

 chemical resistant





MARMO BREDA

 **9mm**
Thickness

60 x 120 cm

 high strength

 maintenance free

 eco friendly

 random designs

 < 0.08% water absorption

 chemical resistant





NOLITA MARQUINA

 **9mm**
Thickness

60 x 120 cm


high
strength


maintenance
free


eco
friendly


random
designs


< 0.08% water
absorption


chemical
resistant





**NOLITA
ROMA**

 **9mm
Thickness**

60 x 120 cm

 high strength

 maintenance free

 eco friendly

 random designs

 < 0.08% water absorption

 chemical resistant







OROBICO PESCO

 **9mm**
Thickness

60 x 120 cm

 high strength  maintenance free  eco friendly

 random designs  < 0.08% water absorption  chemical resistant





**PERLATO
NOBLE**

 **9mm
Thickness**

60 x 120 cm

-  high strength
-  maintenance free
-  eco friendly
-  random designs
-  < 0.08% water absorption
-  chemical resistant







Octane INFINITO
COLLECTION



PERLATO PEARL

 **9mm**
Thickness

60 x 120 cm


high
strength


maintenance
free


eco
friendly


random
designs


< 0.08% water
absorption


chemical
resistant







Ocane INFINITO
COLLECTION

RIVER CAMEL

 **9mm**
Thickness

60 x 120 cm

-  high strength
-  maintenance free
-  eco friendly
-  random designs
-  < 0.08% water absorption
-  chemical resistant





RIVER FLOW

 9mm
Thickness

60 x 120 cm


high
strength


maintenance
free


eco
friendly


random
designs


< 0.08% water
absorption


chemical
resistant





**SPIGO
RIVOLI**

 **9mm**
Thickness

60 x 120 cm


high
strength


maintenance
free


eco
friendly


random
designs


< 0.08% water
absorption


chemical
resistant





**SPIGO
SENA**

 **9mm
Thickness**

60 x 120 cm

 high strength

 maintenance free

 eco friendly

 random designs

 < 0.08% water absorption

 chemical resistant





**STERRAR
MARINE**

 **9mm**
Thickness

60 x 120 cm

 high strength

 maintenance free

 eco friendly

 random designs

 < 0.08% water absorption

 chemical resistant








THUNDER CREPE

$\frac{\downarrow}{\uparrow}$ 9mm
Thickness

60 x 120 cm

- high strength
- maintenance free
- eco friendly
- random designs
- < 0.08% water absorption
- chemical resistant

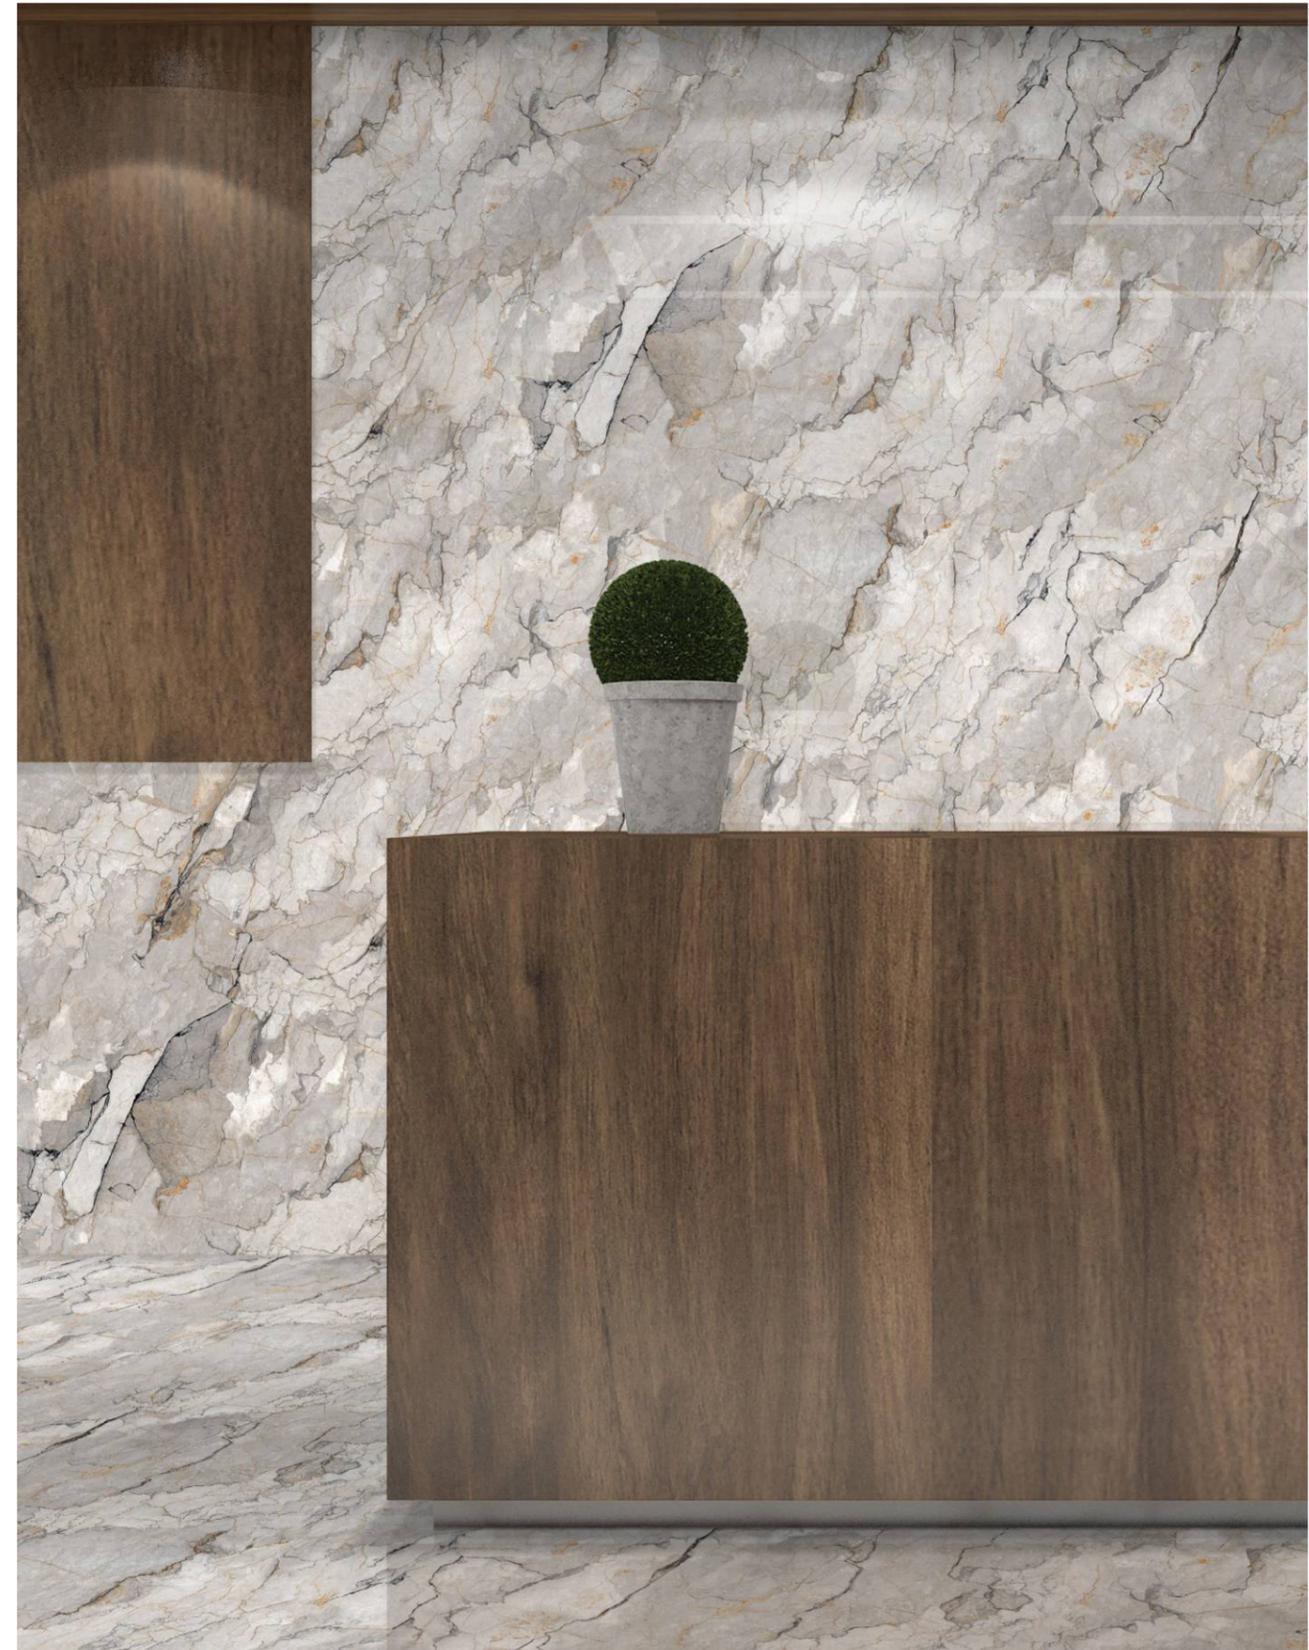





Ocane INFINITO
COLLECTION

THUNDER MONET

 **9mm**
Thickness

60 x 120 cm



high
strength



maintenance
free



eco
friendly



random
designs



< 0.08% water
absorption



chemical
resistant





EXPORTS WORLDWIDE



U.S. TERRITORY

-  MEXICO
-  CANADA

ASIAN TERRITORY

-  SRILANKA
-  MAURATIUS
-  AUSTRALIA
-  VIETNAME
-  TAIWAN
-  THAILAND
-  AFGHANISTAN
-  BANGLADESH
-  NEPAL

SOUTH AMERICA / LATIN AMERICA TERRITORY

-  BOLIVIA
-  CHILE
-  COLOMBIA
-  COSTARICA
-  BDOMINICAN REPUBLIC
-  GUATEMALA
-  HAITI
-  HONDURAS
-  PANAMA
-  PERU
-  PUERTO RICO
-  EL SALVADOR
-  VENEZUELA
-  JAMAICA
-  CURACAO
-  NICARAGUA
-  TOBAGO
-  BURKINA FASO
-  TRINIDAD & TOBAGO
-  ECUADOR

EUROPE & BALCON TERRITORY

-  ALBANIA
-  KOSOVO
-  MACEDONIA
-  GREECE
-  SPAIN

NORTH AFRICA TERRITORY

-  LIBYA
-  NIGERIA
-  SOUTH AFRICA
-  MOROCO
-  ISRAEL
-  TUNISIA
-  SURINAME

MIDDLE EAST TERRITORY

-  BAHRAIN
-  IRAQ
-  KUWAIT
-  OMAN
-  QATAR
-  SAUDI AREBIA
-  LEBANON
-  JORDAN
-  SYRIA



TECHNICAL SPECIFICATIONS



TECHNICAL SPECIFICATIONS - GLAZED VITRIFIED TILES (GROUP Bla)

CHARACTERISTIC	TEST METHOD	INTERNATIONAL STD ISO 13006/EN 176 GROUP BLA	PORCELAIN VALUE
DIMENSION & SURFACE QUALITY			
Deviation In Length	ISO-10545-2	±0.6%	±0.2%
Deviation In Thickness	ISO-10545-2	±5%	±4%
Straightness Of Sides	ISO-10545-2	±0.5%	±0.2%
Rectangularity	ISO-10545-2	±0.6%	±0.2%
Surface Flatness	ISO-10545-2	±0.5%	±0.2%
PHYSICAL & THERMAL PROPERTIES			
Water Absorption	ISO-10545-3	<0.5%	<0.2%
Mohs Hardness	EN-101	Min.3	Min.3
Flexural Strength	ISO-10545-4	>35 N/mm ²	>40N/mm ²
Skid Resistance (Friction Coefficient)	ISO-10545-17	-	<0.2 (R9)
Breaking Strength	ISO-10545-11	>1113 N	>1800 N
Frost Resistance	ISO-10545-12	Frost Proof	Frost Proof
Thermal Shock Resistance	ISO-10545-9	No Damage	No Damage
Moisture Expansion	ISO-10545-10	NIL	NIL
Resistance to Surface Abrasion	ISO-10545-7	-	PEI III & IV
CHEMICAL PROPERTIES			
Chemical Resistance	ISO-10545-13	No Damage	No Damage
Color Resistance	ISO-10545-16	No Damage	No Damage
Stain Resistance	ISO-10545-14	Resistant	Resistant

TECHNICAL SPECIFICATIONS - CERAMIC TILES

CHARACTERISTIC	TEST METHOD	INTERNATIONAL STD ISO 13006/EN 176 GROUP BLA	CERAMIC VALUE
DIMENSION & SURFACE QUALITY			
Deviation In Length	ISO-10545-02	±0.20%	±0.10%
Deviation In Thickness	ISO-10545-02	±7.00%	±0.10%
Straightness Of Sides	ISO-10545-02	±0.15%	±0.10%
Rectangularity	ISO-10545-02	±0.20%	±0.15%
Surface Flatness	ISO-10545-02	±0.30%	±0.20%
PHYSICAL & THERMAL PROPERTIES			
Water Absorption	ISO-10545-03	<10%	16±2%
Mohs Hardness	EN-101	Min. Class 3	Compliant
Flexural Strength	ISO-10545-04	R >15 N/mm ²	Compliant
Skid Resistance (Friction Coefficient)	ISO-10545-08	<9.0 x 10 ⁻⁶ EC ⁻¹	Compliant
Breaking Strength	ISO-13630-06	600 Min.	Compliant
Frost Resistance	ISO-13630-03	0.04 mm/M Max.	Compliant
Thermal Shock Resistance	ISO-10545-09	Min. 10 Cycles	Compliant
Moisture Expansion	ISO-13630-03	0.04 mm/M Max.	Passed 10 Cycle
Resistance to Surface Abrasion	ISO-13630-14	0.55 Min.	4 Cycle Passed
CHEMICAL PROPERTIES			
Chemical Resistance	ISO-10545-13	As per Mfg.	No visible effect
Color Resistance	ISO-10545-13	Class AA Min.	Compliant
Stain Resistance	ISO-10545-14	Class 1 Min.	Compliant



CORPORATE OFFICE:

Edan Ceramic City, Opp. Honest Hotel,
8-A NH, At. Lalpar - 363642, Dist. Morbi, Gujarat - (INDIA)

E-mail : export@reyceramic.com | **Mob.:** +91 90999 06545

GROUP OF COMPANIES:

REY CERA CREATION PVT. LTD.

8-A, N.H , Sartanpar Road, Opp. Kevin Ceramic,
At. Ratavirda, Tal. Wankaner, Dist. Morbi (Gujrat) India.

SIMBEL CERAMIC PVT. LTD.

8-A, National Highway, Dhuva-Matel Road,
At. Lakaddhar, Morbi - 363 642, Gujarat, India

ADORATION CERAMICA PVT.LTD.

8-A, N.H , Virpar-Bhimguda Road, Opp. Armano Vitrified,
Ta. Vankaner, Dist. Morbi (Gujrat) India.



WEB: www.reycera.com

Join us on: | [f](#) [@](#) [t](#) [in](#)